

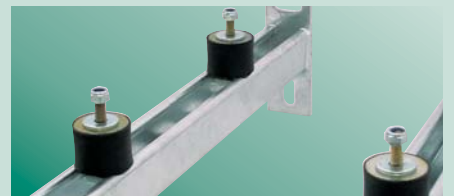


BIS Console Kit

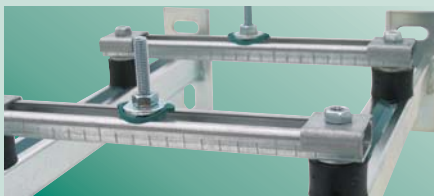

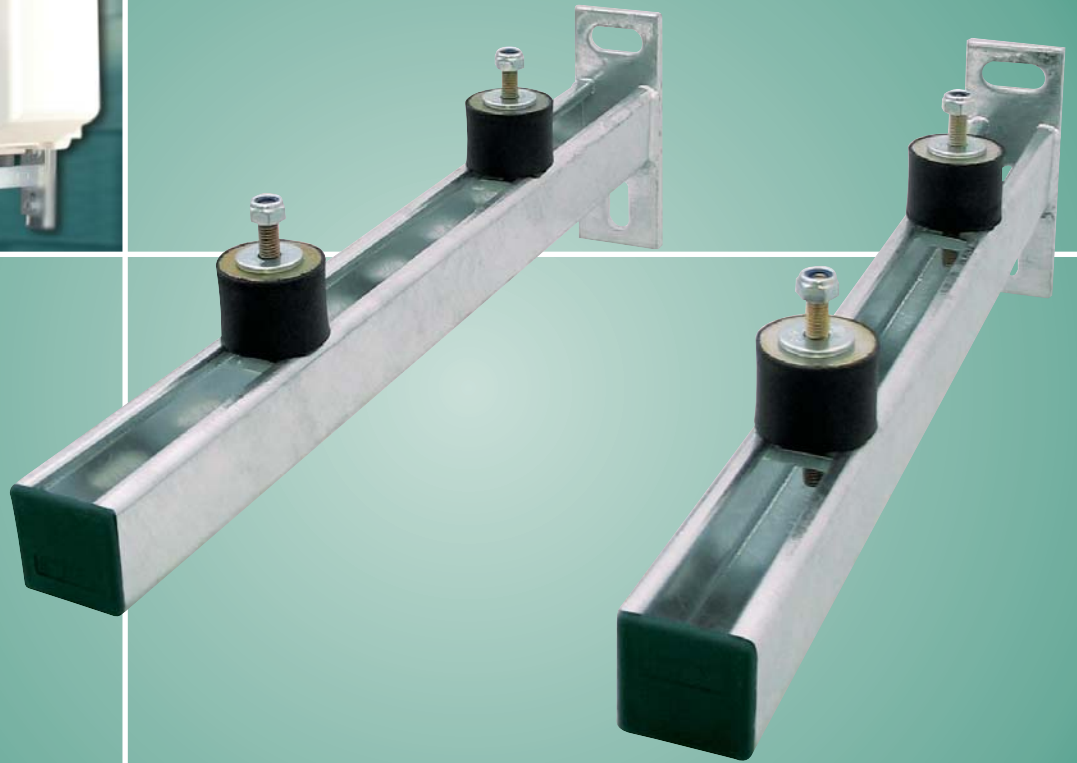

BIS Console Kit

For each appliance the right console!


Whether it concerns wall fixing of air conditioning units, pumps or heaters: Walraven offers different types and lengths of cantilever kits.

BIS Console Kit:

■ For fixing of pumps, pressure-water installations, compressors and other lighter appliances!

BIS Console Kit Clim:

■ For fixing of air conditioning units, heaters, compressors etc.

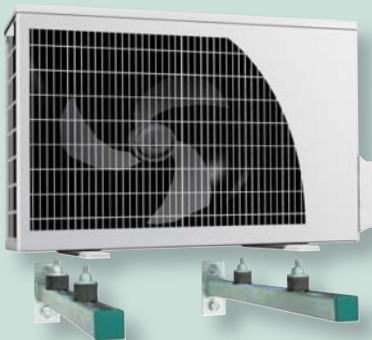

Durable and secure

Concerning wall fixing of appliances, durability and security are important issues. BIS Console Kits undergo a special CO₂ welding process and can therefore accept a high load. Personal safety has been taken into consideration. The supplied end caps close the rail ends in a secure way and protect head, eyes and hands. Durability is taken care of. Every BIS Console Kit is extremely corrosion-resistant.

Complete

Each kit contains 2 cantilever arms and all necessary accessories for easy fixing. For noise insulation vibration isolators are supplied. These are "ready-to-use" pre-assembled and are freely adjustable. Almost any appliance can be fixed to the BIS Console Kit with 2 or 4 fixing holes.

BIS Console Kits are also available at your HVAC wholesaler.

BIS Console Kit


For pumps, pressure-water installations, compressors and other light appliances

BIS Console Kit ISO

Characteristics:

- Cantilever arms: rail WM2 (30 x 30 mm), zinc plated
- Vibration isolators M8: vulcanized rubber, completely pre-assembled with slide nut, washer and self-locking nut
- End caps: PE, green (RAL 6026)

L (mm)	Part No.	Fa,z (N)
300	692 3 230	1.200
400	692 3 240	700
500	692 3 250	500

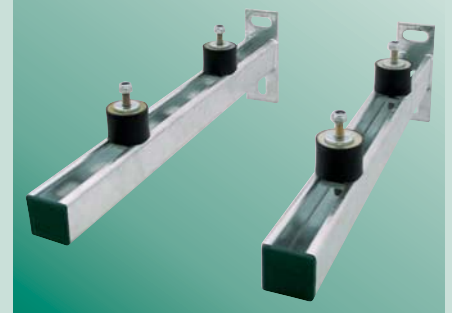


BIS Console Kit ISO – with bridging

For fixing of appliances with 2 fixing holes

Characteristics:

- Cantilever arms: rail WM2 (30 x 30 mm), zinc plated
- Vibration isolators M8: vulcanized rubber, completely pre-assembled with slide nut, washer and self-locking nut
- Bridging rail: rail WM1, length 240 mm
- End caps: PE, green (RAL 6026)
- Slide tee-bolt assembly: M8 x 60 mm

L (mm)	Part No.	Fa,z (N)
300	692 3 235	1.200
400	692 3 245	700

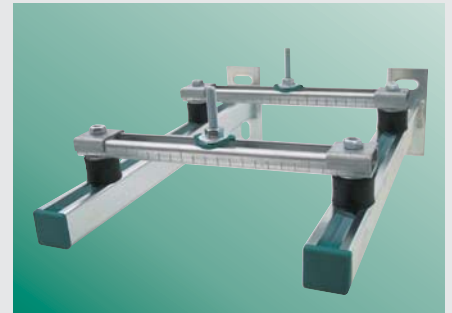

BIS Console Kit – Strut (wall rail)

Characteristics:

- Cantilever arms: Strut 41 x 41 mm, hot-dip galvanised
- Wall rail: Strut 41 x 21 mm, length 500 mm, hot-dip galvanised
- End caps: PE, green (RAL 6026)
- Slide tee-bolt assembly: M8 x 60 mm with self-locking nut

L (mm)	Part No.	Fa,z (N)
450	690 1 946	2.000
600	690 1 961	1.200



BIS Console Kit Clim

For air conditioning units, heaters, compressors etc.

BIS Console Kit Clim ISO – WM (wall rail)

Characteristics:

- Cantilever arms: rail WM2 (30 x 30 mm) or WM35 (38 x 40 mm), zinc plated
- Vibration isolators M8: vulcanized rubber, completely pre-assembled with slide nut, washer and self-locking nut
- Wall rail: Strut 41 x 21 mm, length 500 mm, hot-dip galvanised
- End caps: PE, green (RAL 6026)



L (mm)	Part No.		Fa,z (N)
	WM2	WM35	
450	690 1 745	-	600
520	-	690 1 752	1.000



BIS Console Kit Clim ISO – Strut

Characteristics:

- Cantilever arms: Strut 41 x 41 mm, hot-dip galvanised
- Vibration isolators M8: vulcanized rubber, completely pre-assembled with slide nut, washer and self-locking nut
- End caps: PE, green (RAL 6026)



L (mm)	Part No.		Fa,z (N)
	With wall rail*	Without wall rail	
450	690 1 945	690 1 845	2.000
600	690 1 960	690 1 860	1.200



* Wall rail: Strut 41 x 21 mm, length 500 mm, hot-dip galvanised

BIS Yeti Support System

For use on low pitched or flat rooftops, flat grounds and other flat surfaces

For climate units, pipework, ductwork, walkways, solar panels, cable trays pumps and much more

Your benefits:

- highly adjustable and allows for precise positioning of constructions
- spreads the weight of the installation
- with non-slip anti-vibration mat
- reduces the risk of leaks (no need for penetration of roof membrane)
- saves time and reduces costs



The Netherlands Scandinavia – Finland

Walraven B.V.
P.O. Box 15
3640 AA Mijdrecht (NL)
Tel. +31 (0)297 23 30 00
Fax +31 (0)297 23 30 99
info@walraven.com



United Kingdom Ireland

Walraven Ltd.
Thorpe Way, Banbury (GB)
Oxon, OX16 4UU
Tel. +44 (0)1295 75 34 00
Fax +44 (0)1295 75 34 28
sales.banbury@walraven.com



Germany Austria – Switzerland – South East Europe

Walraven GmbH
Postfach 125128
95425 Bayreuth (DE)
Tel. +49 (0)921 75 60 0
Fax +49 (0)921 75 60 111
info@walraven.de

Other countries

Walraven International
P.O. Box 15
3640 AA Mijdrecht (NL)
Tel. +31 (0)297 23 30 00
Fax +31 (0)297 23 30 99
export@walraven.com



Walraven Group

Mijdrecht (NL) · Tienen (BE) · Bayreuth (DE)
Grenoble (FR) · Banbury (GB) · Madrid (ES)
Mladá Boleslav (CZ) · Kraków (PL) · Kyiv (UA)
Moscow (RU) · Rochester Hills (US)
Shanghai (CN)

walraven.com

Your wholesaler:

