






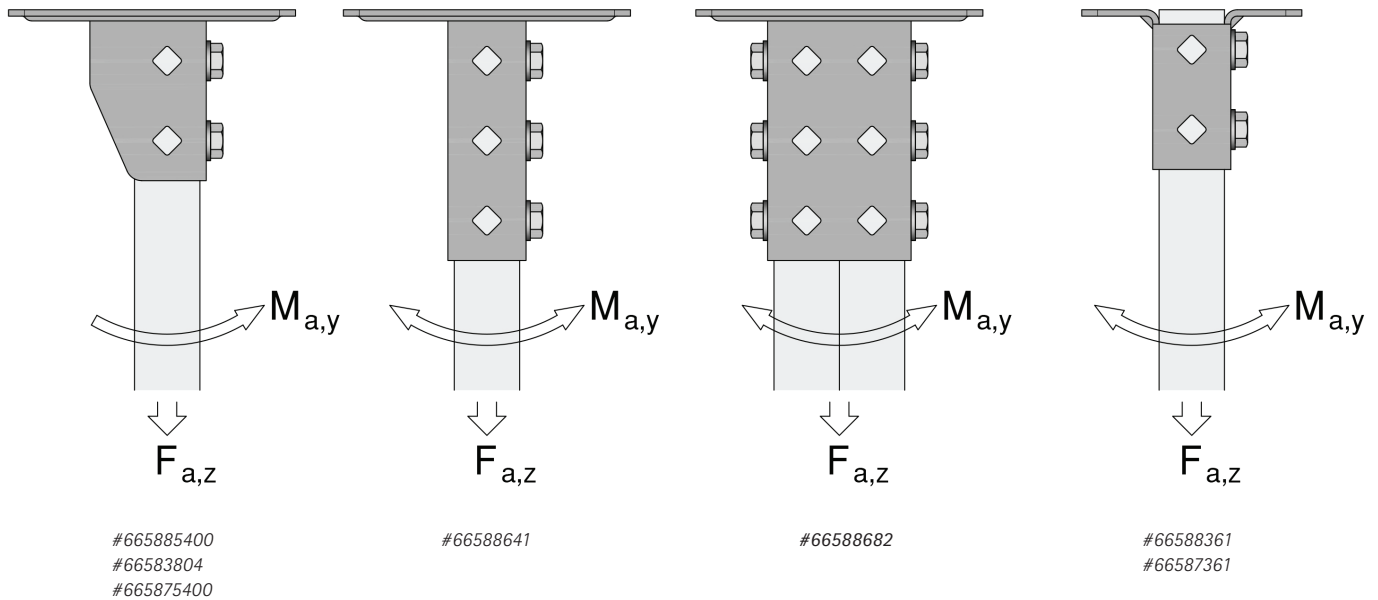

# RapidStrut® Ondersteuningssysteem

## Technische gegevens

### Wandplaten



### Productgegevens

Art.nr.	Fa,z1 (N)* (op schuifmoeren aan de open kant van de rail)	Fa,z2 (N)** (vastgeschroefd aan de achterkant van de rail)	Ma,y (Nm)	
665885400	3,636	5,151	485	 
665875400	3,636	5,151	485	Roestvast Staal
66583804	3,636	5,151	485	
66588641	4,242	5,303	258	
66588682	7,273	10,303	606	
66588361	3,636	3,636	164	
66587361	3,636	3,636	164	Roestvast Staal

Alle waarden zijn getest met 41x41x2,5mm rail.

\* Schuifmoeren 651868010 (M10) en bouten DIN933 M10x25mm, aangedraaid met 40Nm. Aan de open kant van de rail.

\*\* Schuifmoeren 651868010 (M10) en bouten DIN933 M10x25mm, aangedraaid met 40Nm.

Vastgeschroefd in het gatenpatroon aan de achterzijde van de rail; (66588682 met bouten DIN933 M10x110mm & zeskantmoer M10).



UK +44 (0)1295 75 34 28  
DE +49 (0)921 75 60 0  
NL +31 (0)297 23 30 00  
BE +32 (0)16 82 20 40  
FR +33 (0)4 76 04 10 70

ES +34 93 721 33 75  
PL +48 12 684 00 95  
CZ/SK +420 326 724 009  
HU (+36 1) 920 2458  
RU +7 (495) 664 35 08

UA +380 44 351 27 47  
US +1 800 610 5056  
DK +45 46 37 05 10  
SE +46 (0)40 36 54 20  
NO +45 46 37 05 10

CN +86 21 5176 0268  
SG +65 9146 8260  
Other countries  
+31 (0)297 23 30 00