


BIS RapidStrut® Support System

Technical Data

Base plates

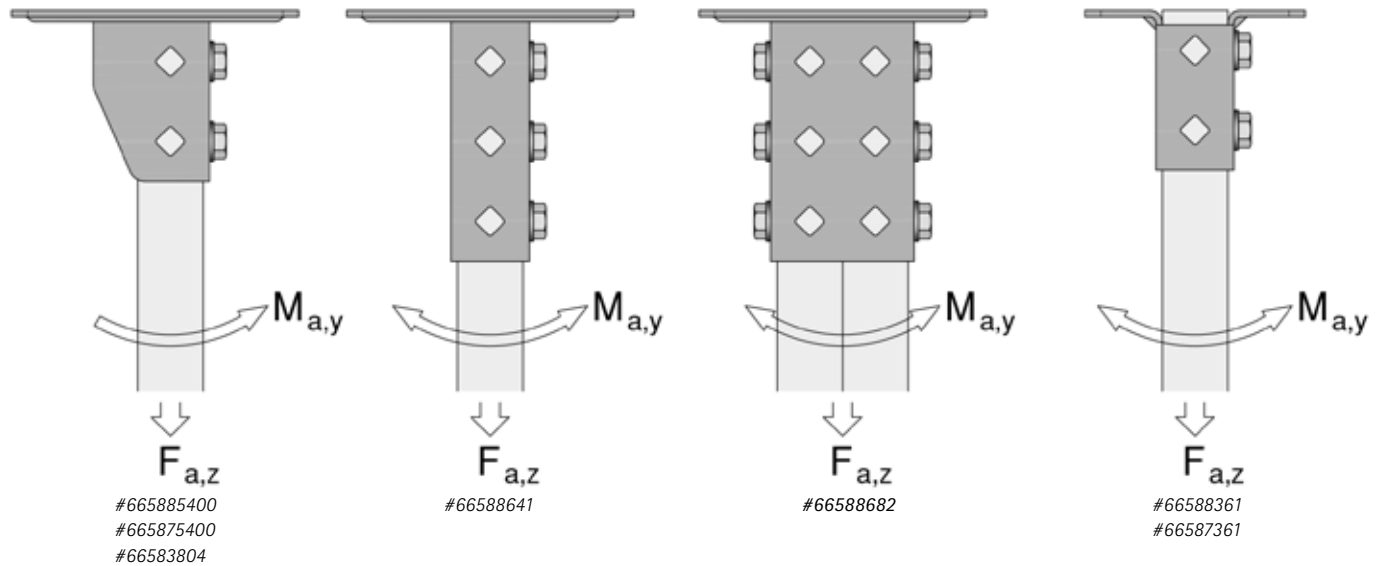

Product details

| Part No. | Fa,z1 (N)* (on Slide Nuts at open side of rail) | Fa,z2 (N)** (bolted through backside of rail) | Ma,y (Nm) | |
|-----------|-------------------------------------------------------|-----------------------------------------------------|-----------|-----------------|
| 665885400 | 3,636 | 5,151 | 485 | |
| 665875400 | 3,636 | 5,151 | 485 | Stainless Steel |
| 66583804 | 3,636 | 5,151 | 485 | |
| 66588641 | 4,242 | 5,303 | 258 | |
| 66588682 | 7,273 | 10,303 | 606 | |
| 66588361 | 3,636 | 3,636 | 164 | |
| 66587361 | 3,636 | 3,636 | 164 | Stainless Steel |

All values tested with Rails 41x41x2.5mm.

* Slide Nuts 651868010 (M10) and Bolts DIN933 M10x25mm, tightened with 40Nm. On open side of rails.

** Slide Nuts 651868010 (M10) and Bolts DIN933 M10x25mm, tightened with 40Nm.

Bolted through backside hole pattern of rails; (66588682 with Bolts DIN933 M10x110mm & Hex. Nut M10).



UK +44 (0)1295 75 34 28
DE +49 (0)921 75 60 0
NL +31 (0)297 23 30 00
BE +32 (0)16 82 20 40
FR +33 (0)4 76 04 10 70

ES +34 93 721 33 75
PL +48 12 684 00 95
CZ/SK +420 326 724 009
HU (+36 1) 920 2458
RU +7 (495) 664 35 08

UA +380 44 351 27 47
US +1 800 610 5056
DK +45 46 37 05 10
SE +46 (0)40 36 54 20
NO +45 46 37 05 10

CN +86 21 5176 0268
SG +65 9146 8260
Other countries
+31 (0)297 23 30 00