



## RapidStrut® Slide Nut



### Product Specifications:

- Replaces tee-nut and washer with single piece
- Can be used with 1-5/8" x 1-5/8", 1-5/8" x 13/16" and DS5: 1-5/8" x 2" strut
- Fits in both deep and shallow strut
- Slide nut with washer and RapidStrut® spring
- Ready-to-use, pre-assembled for quick installation
- Retains assembly in place before final tightening
- Tested for fire safety
- Conforms to Metal Framing Manufacturers Association standards
- Surface protection: Product is part of the BIS UltraProtect® 1000 system - withstands a salt spray corrosion test for a minimum of 1,000 hours (maximum 5% red rust) according to ISO 9227
- Suitable for indoor and outdoor applications
- Material: metal parts made of steel 1.0332, spring(s) made of POM (polyoxymethylene)

Item Number	G (inches)	Fa,x (lbs.)	Items per pkg.
SR66518109	3/8	1,348	20
SR66518113	1/2	2,248	20

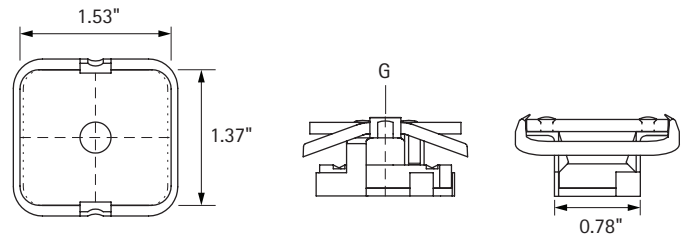

PRODUCT SUBMITTAL		Architect / Owner:
Job Name:		
		Contractor:
Date:		
Part No.	Qty:	Notes:

THE INFORMATION CONTAINED IN THIS SUBMITTAL SHEET IS PROPRIETARY TO WALRAVEN, INC. AND IS SUBJECT TO CHANGE WITHOUT NOTICE. THIS INFORMATION MAY NOT BE REPRODUCED IN PART OR WHOLE WITHOUT WRITTEN AUTHORIZATION FROM WALRAVEN, INC. **walraven**