



BIS RapidStrut® Support System

Technical Data


Wall Plates (Hinged)

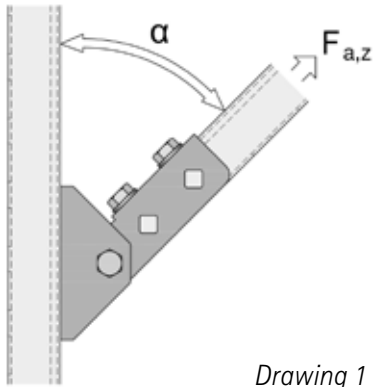

Drawing 1

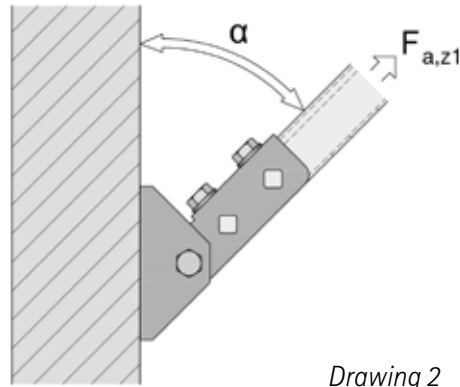

Drawing 2

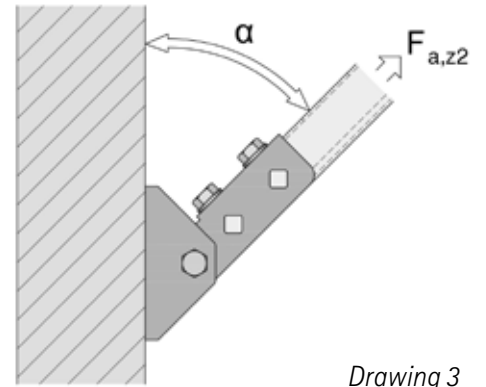

Drawing 3

Product details

Part No.	α°	$F_{a,z}$ (N) (Drawing 1)	$F_{a,z1}$ (N) (Drawing 2)	$F_{a,z2}$ (N) (Drawing 3)	
66588814	0	2,800	3,975	9,700	
	30	2,900	3,975	9,700	
	45	2,500	3,975	9,700	
	60	2,400	3,975	9,700	
	90	3,400	3,975	9,700	
66587814	0	2,800	3,975	9,700	Stainless Steel
	30	2,900	3,975	9,700	Stainless Steel
	45	2,500	3,975	9,700	Stainless Steel
	60	2,400	3,975	9,700	Stainless Steel
	90	3,400	3,975	9,700	Stainless Steel

All values tested with Rails 41x41x2.5mm.

$F_{a,z}/F_{a,z1}$ tested with M12 x 25mm Hex. Bolt Gr. 8.8 DIN 933 & M12 Slide Nut 651868012 through open profile of rail, tightened with 40Nm.

$F_{a,z2}$ tested with M12 x 25mm Hex. Bolt Gr. 8.8 DIN 933 through slotted section of rail into M12 Slide Nut, tightened with 40Nm.



UK +44 (0)1295 75 34 28
 DE +49 (0)921 75 60 0
 NL +31 (0)297 23 30 00
 BE +32 (0)16 82 20 40
 FR +33 (0)4 76 04 10 70

ES +34 93 721 33 75
 PL +48 12 684 00 95
 CZ/SK +420 326 724 009
 HU (+36 1) 920 2458
 RU +7 (495) 664 35 08

UA +380 44 351 27 47
 US +1 800 610 5056
 DK +45 46 37 05 10
 SE +46 (0)40 36 54 20
 NO +45 46 37 05 10

CN +86 21 5176 0268
 SG +65 9146 8260
Other countries
 +31 (0)297 23 30 00