


# BISOFIX® E13

for isolerede rør 8,0 - 168,3 mm


(D 03 02)

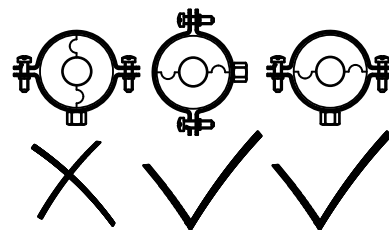

## Funktioner og fordele

- til kombination med elastomerisk skumisulering
- vapoursikker kan limes med rørsulering
- indeholder ikke CFC, HCFC, formaldehyd eller cadmium
- brandklasse B2
- PIR densitet for D <80mm = 80kg/m<sup>3</sup>
- PIR densitet for D >80mm = 120kg/m<sup>3</sup>
- temperaturområde -45 °C - +105 °C

Art.nr.	VVS nr.	D (mm)	D (°)	DN	L	H (mm)	s (mm)	F <sub>a,z</sub> (N)	Pakke 1
I130000008	018059008	8,0	-	-	50 mm	34,6	13,3	100	25
I130000010	018059010	10,2	-	-	50 mm	36,8	13,3	100	25
I130000012	018059012	12,0	-	-	50 mm	38,6	13,3	100	25
I130000015	018059015	15,0	-	-	50 mm	41,6	13,3	100	25
I130000018	018059018	17,2 - 18,0	3/8	10	50 mm	44,6	13,3	100	25
I130000022	018059022	21,3 - 22,0	1/2	15	50 mm	48,6	13,3	100	25
I130000028	018059028	26,9 - 28,0	3/4	20	50 mm	55,0	13,5	100	25
I130000035	018059035	33,7 - 35,0	1	25	50 mm	61,6	13,3	100	25
I130000042	018059042	42,4	1 1/4	32	50 mm	69,0	13,3	150	25
I130000048	018059048	48,3	1 1/2	40	50 mm	74,9	13,3	225	25
I130000054	018059054	54,0	-	-	50 mm	80,6	13,3	225	25
I130000057	018059057	57,0	-	-	50 mm	83,6	13,3	350	25
I130000060	018059060	60,3	2	50	50 mm	88,1	13,9	350	25
I130000064	018059064	64,0	-	-	50 mm	100,0	18,0	350	25
I130000070	018059070	70,0	-	-	50 mm	102,6	16,3	425	25
I130000076	018059076	76,1	2 1/2	65	50 mm	108,7	16,3	575	25
I130000089	018059089	88,9	3	80	50 mm	124,7	17,9	875	25
I130000102	018059092	101,6	-	-	50 mm	134,2	16,3	1.000	25
I130000108	018059090	108,0	-	-	50 mm	140,6	16,3	1.075	25
I130000114	018059091	114,3	4	100	50 mm	152,1	18,9	1.250	25
I130000133		133,0	-	-	100 mm	165,6	16,3	1.475	25
I130000140		139,7	5	125	100 mm	176,1	18,2	1.700	5
I130000160		159,0 - 160,0	-	-	100 mm	192,6	16,3	1.950	5
I130000168		168,3	6	150	100 mm	200,9	16,3	2.125	5

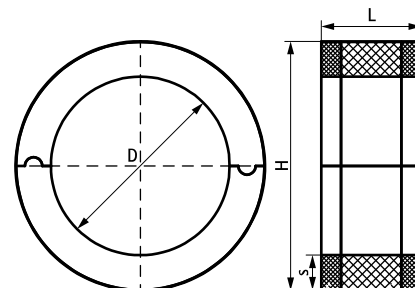

### Supplement

25 Rørbøjle (M8/10)  
Walraven Industri Rørbøjler HD500  
(BUP1000)  
Walraven Industri Rørbøjler HD500  
(BUP1000)

### Supplement

Bifix® G2 (M8/10) (BUP1000)