

BIS Ansatzschrauben

(K 40 10)

Befestigung an Wand oder Decke


985



Vorteile und Eigenschaften

- Material: Stahl
- elektrolytisch verzinkt

Art.Nr.	G	L	Lh (mm)	Lm1 (mm)	PØ (mm)	VPE 1	VPE 2	Gew / 1 Einh (g)
6353635	M6	35 mm	25	8	8	100	2.000	5.10
6353650	M6	50 mm	30	6	8	100	1.000	7.50
6353680	M6	80 mm	50	6	8	100	500	13.00
6353850	M8	50 mm	30	8	10	100	-	16.00
6353860	M8	60 mm	30	8	10	100	1.000	18.50
6353880	M8	80 mm	30	8	10	100	-	22.50
6353890	M8	90 mm	50	12	10	100	500	22.00

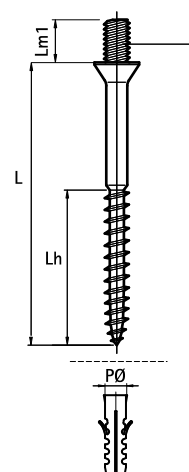

Kombination mit
BIS Metallspreizdübel