


BIS Knotenketten (DIN 5686)


(K 50 10)

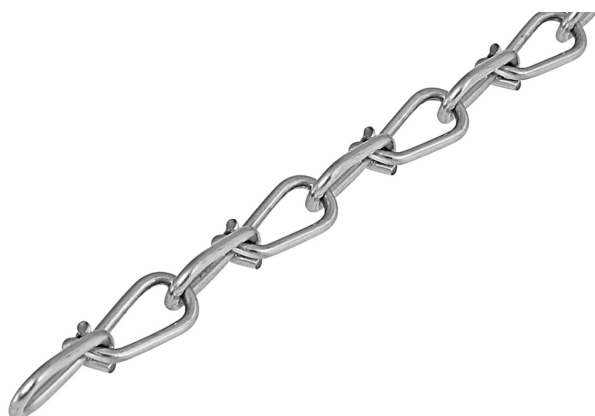

Vorteile und Eigenschaften

- nach DIN 5686
- Material: Stahl
- elektrolytisch verzinkt

Art.Nr.	L	s (mm)	d1 (mm)	F _{a,z} (N)	VPE 1	Einh.	Gew / 1 Einh (g)
0912022	30 m	2,0	28 x 5,0	320	30	m.	87.00
0912027	30 m	2,5	35 x 6,0	500	30	m.	123.00
0912030	30 m	2,8	39 x 6,0	600	30	m.	160.00
0913032	30 m	3,1	41 x 8,0	750	30	m.	203.00

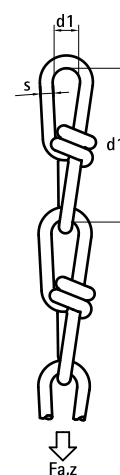

Kombination mit
 BIS S-Haken
 BIS Ketten Notglied
 BIS Sicherheitshaken