


# Walraven Gewindestifte (ev)

(K 55 05)

Befestigung an Schienen, Wandplatten, usw.

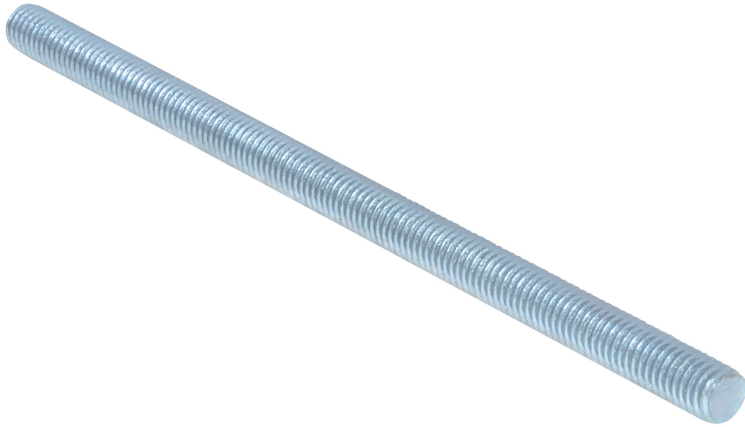


## Vorteile und Eigenschaften

- Material: Stahl, Festigkeitsklasse 4.8
- elektrolytisch verzinkt
- erfüllt die Brandschutzanforderungen der MLAR/LAR/RbALei



Art.Nr.	Typ	G	L	A <sub>s,nom</sub> (mm <sup>2</sup> )	F <sub>a,z</sub> (N)	VPE 1	VPE 2	Gew / 1 Einh (g)
6313802	DIN 976-1	M8	25 mm	36,6	9.700	100	1.000	7.00
6313803	DIN 976-1	M8	30 mm	36,6	9.700	100	1.000	9.00
6313804	DIN 976-1	M8	40 mm	36,6	9.700	100	1.000	12.00
6313805	DIN 976-1	M8	50 mm	36,6	9.700	100	1.000	15.00
6313806	DIN 976-1	M8	60 mm	36,6	9.700	100	1.000	18.00
6313807	DIN 976-1	M8	70 mm	36,6	9.700	100	1.000	21.00
6313808	DIN 976-1	M8	80 mm	36,6	9.700	100	500	24.00
6313809	DIN 976-1	M8	90 mm	36,6	9.700	100	500	27.00
6313810	DIN 976-1	M8	100 mm	36,6	9.700	100	500	30.00
6313812	DIN 976-1	M8	120 mm	36,6	9.700	50	250	37.00
6313815	DIN 976-1	M8	150 mm	36,6	9.700	50	250	46.00
6313818	DIN 976-1	M8	180 mm	36,6	9.700	50	250	55.00
6313820	DIN 976-1	M8	200 mm	36,6	9.700	50	250	58.00
6323002	DIN 976-1	M10	25 mm	58,0	15.400	50	500	11.00
6323003	DIN 976-1	M10	30 mm	-	-	50	500	14.00
6323004	DIN 976-1	M10	40 mm	58,0	15.400	50	500	18.00
6323005	DIN 976-1	M10	50 mm	58,0	15.400	50	500	23.00
6323006	DIN 976-1	M10	60 mm	58,0	15.400	50	500	28.00
6323007	DIN 976-1	M10	70 mm	58,0	15.400	50	500	37.00
6323008	DIN 976-1	M10	80 mm	58,0	15.400	50	500	38.80
6323009	DIN 976-1	M10	90 mm	58,0	15.400	50	500	43.00
6323010	DIN 976-1	M10	100 mm	58,0	15.400	50	250	49.00
6323012	DIN 976-1	M10	120 mm	58,0	15.400	50	-	59.00
6323016	DIN 976-1	M10	160 mm	58,0	15.400	50	250	78.00
6323018	DIN 976-1	M10	180 mm	58,0	15.400	50	250	90.00
6323020	DIN 976-1	M10	200 mm	58,0	15.400	50	250	96.00

Ab M10 Bestandteil des brandgeprüften Befestigungssystems

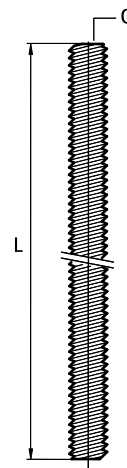

### Kombination mit

- Walraven Gewindemuffen (ev)
- Walraven Gewindestangenverbinder (sv)