


## 2S Clamp with Lining (M8)

(A 05 132)

for steel, copper, cast iron and plastic (multilayer) pipe 10 - 67 mm

M8

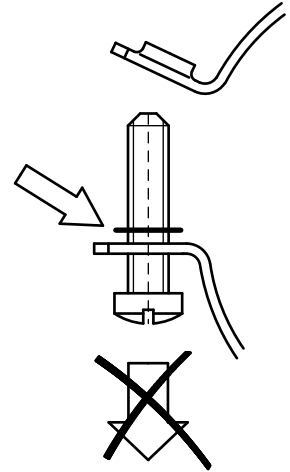

### Features and benefits

- gapless range
- rubber lining grips in steel parts to prevent sliding of the lining
- anti loss washers prevent screws from falling out during installation
- material: steel
- zinc plated
- temperature resistance from -30 °C to +120 °C
- noise insulating lining, EPDM rubber, black
- age resistant lining
- sound insulating lining according DIN 4109
- noise reduction according to ISO 3822-1 up to 22 dB(A)



Part No.	D (mm)	D (°)	DN	G	B (mm)	H (mm)	h (mm)	b x s (mm)	cs	F <sub>az</sub> (N)	RAL	Pack 1
33335014	10 - 14	1/8 - 1/4	6 - 8	M8	51	32	20	20 x 1.00	M5	330	RAL <sup>1</sup>	50
33335019	15 - 19	3/8	10	M8	56	37	22	20 x 1.00	M5	330	RAL <sup>1</sup>	50
33335024	20 - 24	1/2	15	M8	62	43	25	20 x 1.00	M5	330	RAL <sup>1</sup>	50
33335030	25 - 30	3/4	20	M8	69	50	29	20 x 1.00	M5	330	RAL <sup>1</sup>	50
33335037	31 - 37	1	25	M8	75	56	32	20 x 1.00	M5	330	RAL <sup>1</sup>	50
33335046	38 - 46	1 1/4	32	M8	84	66	37	20 x 1.25	M5	500	RAL <sup>1</sup>	50
33335052	47 - 52	1 1/2	40	M8	93	75	41	20 x 1.25	M5	500	RAL <sup>1</sup>	50
33335061	53 - 61	2	50	M8	99	81	44	20 x 1.25	M5	500	RAL <sup>1</sup>	50
33335067	62 - 67	-	-	M8	106	87	47	20 x 1.25	M5	500	RAL <sup>1</sup>	50

*RAL<sup>1</sup> = tested, certified and monitored by a third party according to RAL-GZ 655/B.*

