


BISOFIX® E13

for insulated pipes 8,0 - 168,3 mm


(D 03 02)

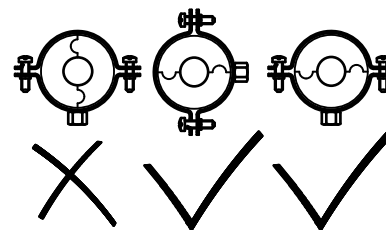

Features and benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for D <80mm = 80kg/m³
- PIR density for D >80mm = 120kg/m³
- temperature range -45 °C - +105 °C

Part No.	D (mm)	D (°)	DN	L	H (mm)	s (mm)	F _{a,z} (N)	Pack 1
I130000008	8,0	-	-	50 mm	34.6	13.3	100	25
I130000010	10,2	-	-	50 mm	36.8	13.3	100	25
I130000012	12,0	-	-	50 mm	38.6	13.3	100	25
I130000015	15,0	-	-	50 mm	41.6	13.3	100	25
I130000018	17,2 - 18,0	3/8	10	50 mm	44.6	13.3	100	25
I130000022	21,3 - 22,0	1/2	15	50 mm	48.6	13.3	100	25
I130000028	26,9 - 28,0	3/4	20	50 mm	55.0	13.5	100	25
I130000035	33,7 - 35,0	1	25	50 mm	61.6	13.3	100	25
I130000042	42,4	1 1/4	32	50 mm	69.0	13.3	150	25
I130000048	48,3	1 1/2	40	50 mm	74.9	13.3	225	25
I130000054	54,0	-	-	50 mm	80.6	13.3	225	25
I130000057	57,0	-	-	50 mm	83.6	13.3	350	25
I130000060	60,3	2	50	50 mm	88.1	13.9	350	25
I130000064	64,0	-	-	50 mm	100.0	18.0	350	25
I130000070	70,0	-	-	50 mm	102.6	16.3	425	25
I130000076	76,1	2 1/2	65	50 mm	108.7	16.3	575	25
I130000089	88,9	3	80	50 mm	124.7	17.9	875	25
I130000102	101,6	-	-	50 mm	134.2	16.3	1,000	25
I130000108	108,0	-	-	50 mm	140.6	16.3	1,075	25
I130000114	114,3	4	100	50 mm	152.1	18.9	1,250	25
I130000133	133,0	-	-	100 mm	165.6	16.3	1,475	25
I130000140	139,7	5	125	100 mm	176.1	18.2	1,700	5
I130000160	159,0 - 160,0	-	-	100 mm	192.6	16.3	1,950	5
I130000168	168,3	6	150	100 mm	200.9	16.3	2,125	5

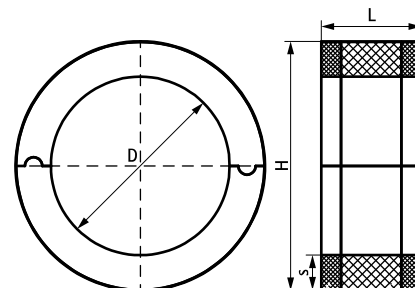

Complementary

- 2S Clamp (M8/10)
- BIS Heavy Duty Clamp HD500 (BUP1000)
- BIS Heavy Duty Clamp HD500 (BUP1000)

Complementary

- Bifix® G2 (M8/10) (BUP1000)