


# Pacifyre® AWM II Fire Collar


(U 04 30)

for sealing of insulated or non-insulated flammable pipes and multi-layer pipes 32 – 400 mm

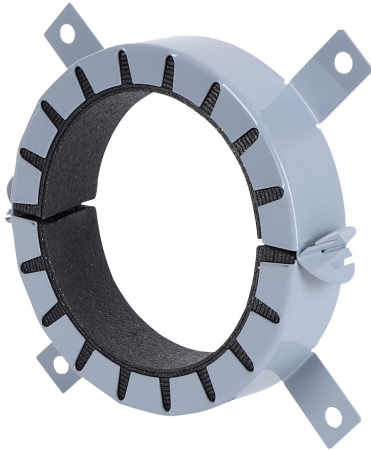

## Features and benefits


- built-up fire collar for plastic (combustible) pipes and pipe systems. For apertures in walls (solid walls or light partition walls) and ceilings with fire protection in accordance with UK Legislation
- the installation of elbows, pipe couplings or branch pipes into the wall or directly in, or under the ceiling is possible due to the superficial height of the sleeve
- angular insertion is possible
- installation of telecommunications pipeline- or protective piping with up to 2 cables is possible
- suitable for damp conditions
- should be fitted to both sides of a wall and on one side below a ceiling
- flexible annular gap seal
- the use of PE noise insulation hose up to a thickness of 4 mm of composite natural rubber insulation to a thickness of 43 mm is allowed
- offset installation of sleeve is permitted
- build in is possible without additional fixings (by simply bending and sliding the fixing tabs)
- zero distance is possible between fire collars
- in approval with the German Institute for civil engineering (DIBt) in accordance with Z 19.17-1194 and monitored by the MPA Braunschweig, Germany
- European approval: ETA-13/0906

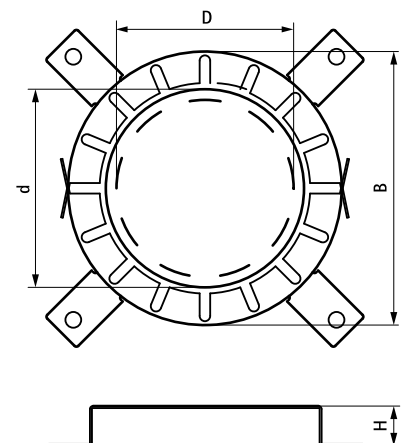

Pacifyre® AWM II Fire Collar

(U 04 30)

for sealing of insulated or non-insulated flammable pipes and multi-layer pipes 32 - 400 mm

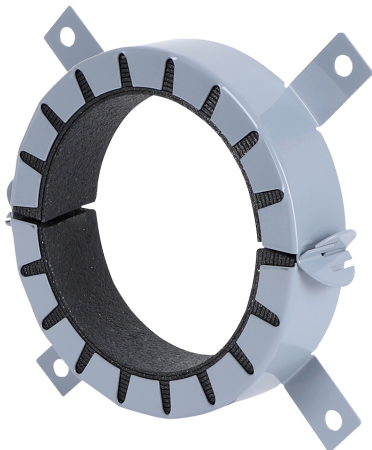

|            |     |     |                |     |    |   |
|------------|-----|-----|----------------|-----|----|---|
| 2134225225 | 225 | 239 | 10 fixing tabs | 328 | 50 | 1 |
| 2134250250 | 250 | 264 | 10 fixing tabs | 353 | 50 | 1 |
| 2134280280 | 280 | 289 | 12 fixing tabs | 378 | 50 | 1 |
| 2134300300 | 300 | 314 | 12 fixing tabs | 403 | 50 | 1 |
| 2134315315 | 315 | 328 | 12 fixing tabs | 417 | 50 | 1 |
| 2134355355 | 355 | 364 | 12 fixing tabs | 453 | 50 | 1 |
| 2134400400 | 400 | 414 | 12 fixing tabs | 503 | 50 | 1 |

