


Walraven Pacifyre® FPC Fire Collar


(U 04 02)

for fire resistant sealing of plastic and multi-layer pipes 50 - 160 mm

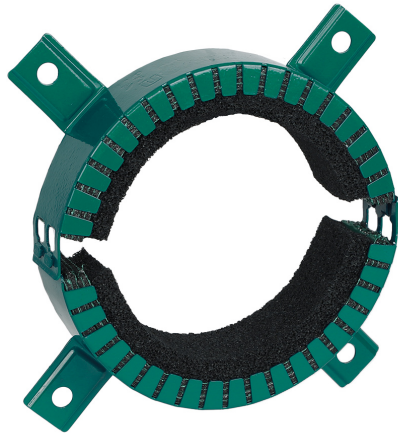


Features and benefits

- for application in flexible walls, rigid walls and rigid floors
- suitable for combustible pipes with intended use as rainwater, sewage, gas, drinking water and heating or cooling
- for various combustible pipe materials such as PP-H, PVC and PE
- suited for certain branded pipes
- easy to install due to the connection hooks
- possible to mount 1 half and connect other half later
- collar stays in place by itself in vertical situations because of Foam layer
- with a fire resistance up to EI 120 U/U
- built-in sound insulation
- tested according to EN 1366-3
- European approval: ETA-22/0341



Part No.	D (mm)	d (mm)	Model	B (mm)	H (mm)	Pack 1
2122000050	50	58	2 fixing tabs	148,5	30	1
2122000063	63	71	4 fixing tabs	129,1	30	1
2122000075	75	83	4 fixing tabs	146,8	40	1
2122000090	90	98	4 fixing tabs	156,8	40	1
2122000110	110	118	4 fixing tabs	175,5	40	1
2122000125	125	133	4 fixing tabs	169,1	60	1
2122000140	140	148	6 fixing tabs	259,0	60	1
2122000160	160	168	6 fixing tabs	284,0	60	1

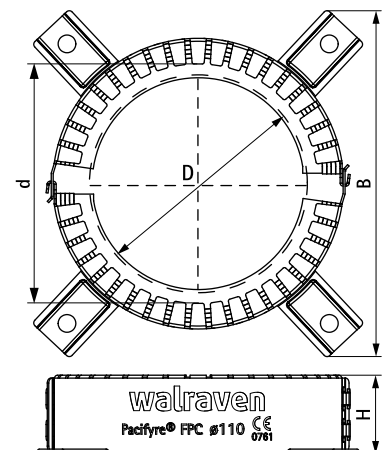

Complementary

- Pacifyre® A Acrylic Fire Sealant
- Pacifyre® FPM
- Pacifyre® ID-Card