

# Walraven RapidRail® Cantilever Arm

(G 10 07)

fixing to wall, floor or ceiling





## Features and benefits

- base plate with welded C-profile
- for quick and adjustable fixing of one or multiple pipes
- CO<sub>2</sub> welded
- with continuous perforation
- with sawing marks each 50 mm
- unique hole pattern at type 30x20 and 38x40 allows to click in Walraven RapidRail® Hammerfix from both sides
- material: base plate made of steel 1.0332 (DD11)
- material: profiles type 27x18 and 30x20 made of steel 1.0330 (DC01)
- material: profiles type 30x15, 30x30 and 38x40 made of steel 1.0038 (S235JR)
- zinc plated
- type 38x40 is part of the Walraven BIS UltraProtect® 1000 system
- for more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details Walraven RapidRail®'

Part No.	Type	L	B	H	s	d1	S	k	Pack 1
			(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
66031815	27x18	150 mm	38	110	4,0	16 x 11	15	70	20
66031820	27x18	200 mm	38	110	4,0	16 x 11	15	70	20
66031830	27x18	300 mm	38	110	4,0	16 x 11	15	70	20
66031850	27x18	500 mm	38	110	4,0	16 x 11	15	70	20
66031520	30x15	200 mm	38	110	4,0	16 x 11	15	70	20
66031530	30x15	300 mm	38	110	4,0	16 x 11	15	70	20
66032015	30x20	150 mm	38	110	4,0	16 x 11	15	70	20
66032020	30x20	200 mm	38	110	4,0	16 x 11	15	70	20
66032025	30x20	250 mm	38	110	4,0	16 x 11	15	70	20
66033020	30x30	200 mm	48	110	5,0	18 x 11	15	70	10
66033025	30x30	250 mm	48	110	5,0	18 x 11	15	70	10
66033030	30x30	300 mm	48	110	5,0	18 x 11	15	70	10
66033040	30x30	400 mm	48	110	5,0	18 x 11	15	70	20
66033050	30x30	500 mm	48	110	5,0	18 x 11	15	70	20

For more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details Walraven RapidRail®'.

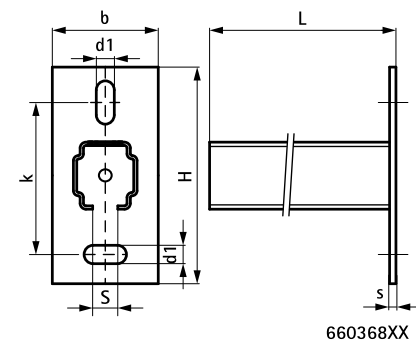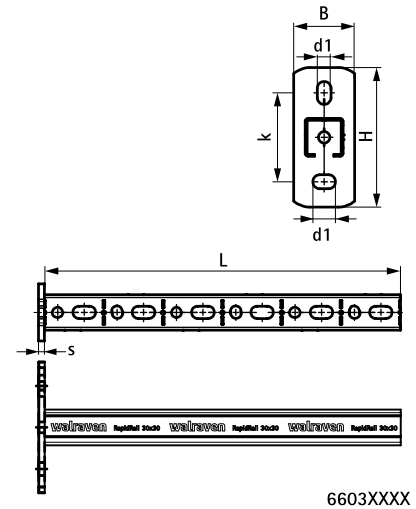

### Complementary

Walraven Rail Prop  
Walraven RapidRail® Slide Nut  
Walraven Rail End Cap

### Complementary

Walraven RapidRail® Hammerfix  
Walraven Rubber Strip  
BIS Expansion Device