


Walraven RapidRail® Fixing Rail

(G 04 05)

for light fixing applications

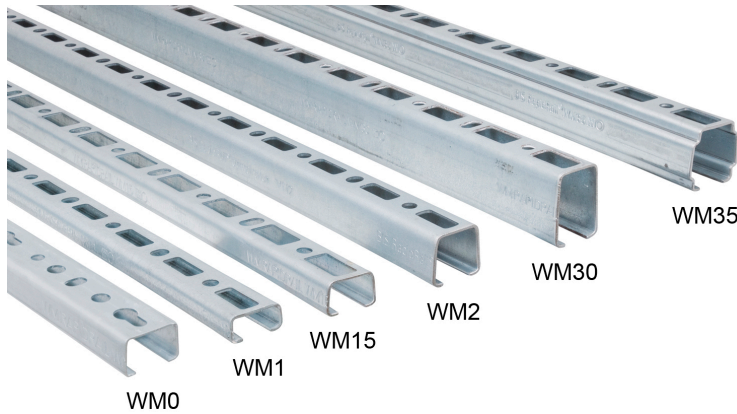

Features and benefits


- C-profile
- for a quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- material: steel 1.0242
- pre-galvanized
- for more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'



RAL-GZ 655/C
Cert.Nr. 2012-03

Part No.	Type	L	B	H	s	S	RAL	BndS	BndL	App.
			(mm)	(mm)	(mm)	(mm)				
6505002	30x30	2 m	30	30	2.00	15	RAL ¹	20	400	m.
6505302	30x30	3 m	30	30	2.00	15	RAL ¹	30	600	m.
6505602	30x30	6 m	30	30	2.00	15	RAL ¹	60	600	m.

RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/C.
For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.
For more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.

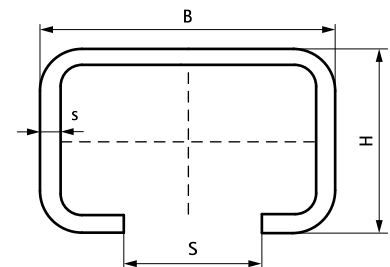

Complementary

Walraven RapidRail® Slide Nut
Walraven RapidRail® Hammerfix
Walraven Rail End Cap

Complementary

Walraven RapidRail® Connector 90°
Walraven RapidRail® Connector 135°