


Walraven Strut Wall Plate (Hinged) (BUP1000)

(H 12 25)

fixing to wall

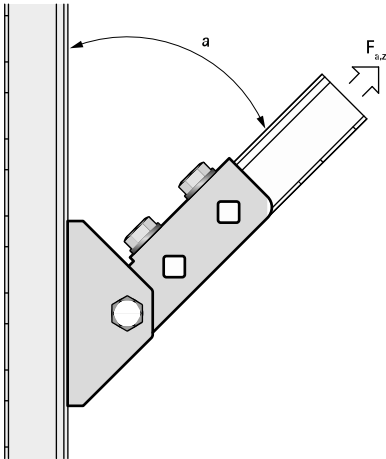

Features and benefits

- wall plate with hinging U-profile
- for wall fixing of rail
- rail can be fixed with slot downwards or sideways
- also used to strengthen constructions with Strut 41x41
- material: steel 1.0332
- surface protection:
  - product is part of the Walraven BIS UltraProtect® 1000 system
  - suitable for in- and outdoor applications
  - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

| Part No.  | L      | B    | H    | b    | s    | d1      | d2   | S    | k    | k1   | For Rail | F <sub>a,z</sub> | Pack 1 |   |
|---|--------|------|------|------|------|---------|------|------|------|------|----------|------------------|--------|---|
|   |        | (mm) | (mm) | (mm) | (mm) | (mm)    | (mm) | (mm) | (mm) | (mm) |          | (N)              |        |   |
| 66588814  | 120 mm | 83   | 157  | 59   | 4.0  | 25x12.2 | 13.8 | 42   | 71   | 50   | Strut    | 2,500            | 10     | * |
| Max. allowed load (F <sub>a,z</sub> ) under an angle of 45°.<br>* Tested with rail 41x41x2.5 with throughbolts. More details can be found on the Technical Datasheet. |        |      |      |      |      |         |      |      |      |      |          |                  |        |   |

