


# Walraven Yeti® Triplex Separation Layer

(1 04 55)


for Rooftop Installations

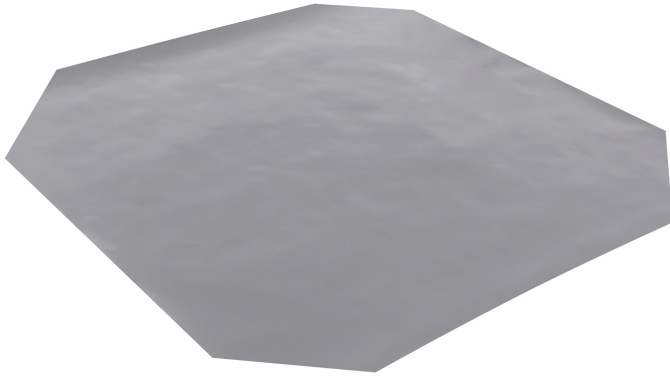

## Features and benefits

- 3-layer release and protection layer for use between BIS Yeti® and Ursus mounting foot and PVC roof
- size 350x350 by 1/4 pitch also suitable for BIS Yeti® 130
- high coefficient of static friction (between 0.400 and 0.500 depending on roof pitch and dry / wet condition)
- use on both sides possible
- to protect PVC roofs against plasticizer migration
- two standard dimensions for BIS Yeti® 480 and BIS Yeti® 335, all other BIS Yeti® and Ursus feet dimensions need to be adjusted by cropping
- material: HDPE film (black), aluminum foil, PET film (transparent)

Part No.	L	B (mm)	Pack 1	Pack 2
67685403	350 mm	350	10	300
67685405	500 mm	500	10	200

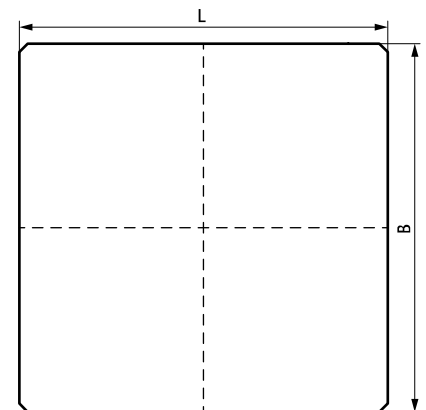

### Complementary

Walraven Yeti® 480 Support System  
 Walraven Yeti® 335 Support System  
 Walraven Yeti® 335 Frame Set

### Complementary

Walraven Yeti® 280 Support System