


Walraven RapidRail® Fixing Rail

(G 04 05)

for light fixing applications

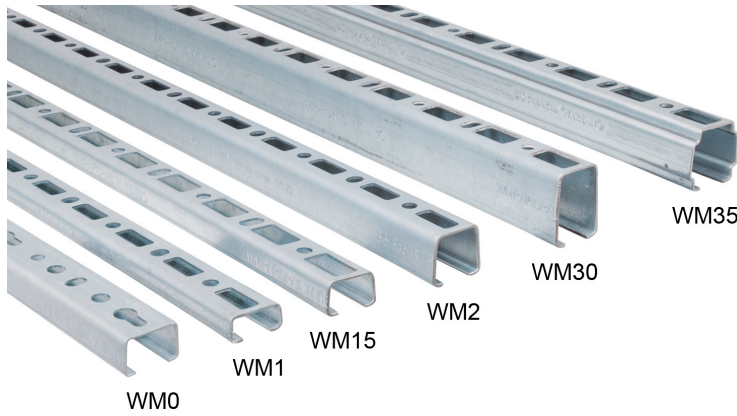

Features and benefits


- C-profile
- for quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- continuous graduated centimeter scale on one side
- material: steel 1.0242
- pre-galvanized
- for more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'



RAL-GZ 655/C
Cert.Nr. 2012-03

| Part No. | Type | L | B (") | H (") | s (Ga) | S (") | BndS | BndL | App. |
|----------|------|-------|----------|----------|-----------|----------|------|------|------|
| 65059502 | WM15 | 10" | 1 3/16 | 3/4 | 16 | 5/8 | 20 | - | ft. |
| 65059505 | WM15 | 20" | 1 3/16 | 3/4 | 16 | 5/8 | 10 | - | ft. |
| 65059510 | WM15 | 3' 3" | 1 3/16 | 3/4 | 16 | 5/8 | 10 | - | ft. |

For more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.

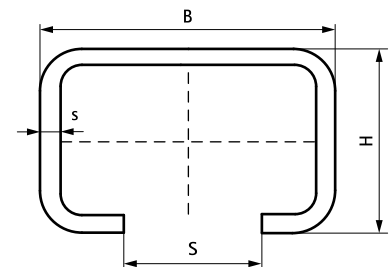

Complementary

- Walraven Rail End Cap
- Walraven RapidRail® Connector 90°
- Walraven RapidRail® Connector 135°