

BIS RapidStrut® Cross Connector G2 (BUP1000)

(H 28 134)



to make Strut rail fabrications



Features and benefits

- connector with pre-assembled BIS RapidStrut® Slide nut(s)
- to make fabrication with Strut Rail
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- 'Direct Twist' technology for easy and secure installation
- visual guide to check the position of the slide nut
- optimized for easy installation with electrical tools
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- surface protection:
 - product is part of the BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No.	h (mm)	T _(max.) (Nm)	For Rail	Pack 1
665885402	20	40.0	Strut 41x21	25
665885404	40	40.0	Strut 41x41	25
665885405	50	40.0	Strut 41x51 (BIS RapidStrut® DS 5)	25
665885406	60	40.0	Strut 41x62	15
665885408	80	40.0	Strut 41x82	10

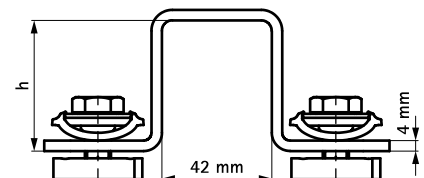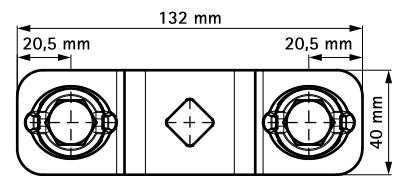

Complementary

BIS RapidStrut® Fixing Rail DS 5
(BUP1000)