


Di Electric Union Model C

(N 05 330)

steel female thread to copper male thread

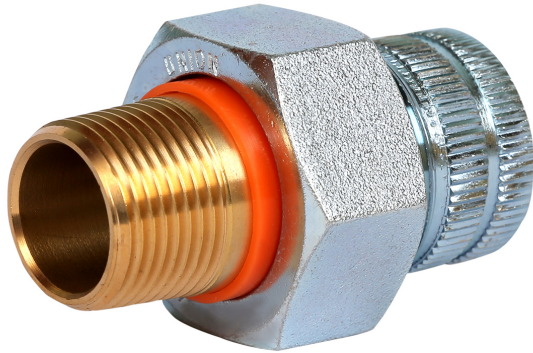

Features and benefits

- designed for installation of two non similar pipes to prevent corrosion and deterioration in piping systems due to galvanic and stray current
- Construction Features
 - electrogalvanized threaded steel body with integral sweat end on one side with brass threaded/solder coupler
 - dielectric coupler sleeve and separator gasket to prevent metal to metal contact
 - lead free construction to comply with lead free installation requirements
- Technical Data
 - maximum pressure: 250 PSI / 17 bar
 - temperature resistance: from -30 °C to +120 °C
 - electrogalvanized as per ASTM B 633 Standards (SC3)
 - dielectric strength: ASTM D149, BS 2782, DIN 53483
 - threading: BS21 : 1985 (NPT available on request)

Part No.	D (")	Model
DMDEUC022	1/2	Steel MT 1/2" x Copper MT 1/2"
DMDEUC028	3/4	Steel MT 3/4" x Copper MT 3/4"
DMDEUC035	1	Steel MT 1" x Copper MT 1"
DMDEUC040	1 1/4	Steel MT 1 1/4" x Copper MT 1 1/4"
DMDEUC048	1 1/2	Steel MT 1 1/2" x Copper MT 1 1/2"
DMDEUC060	2	Steel MT 2" x Copper MT 2"