


Pipe Roller

(B 50 315)

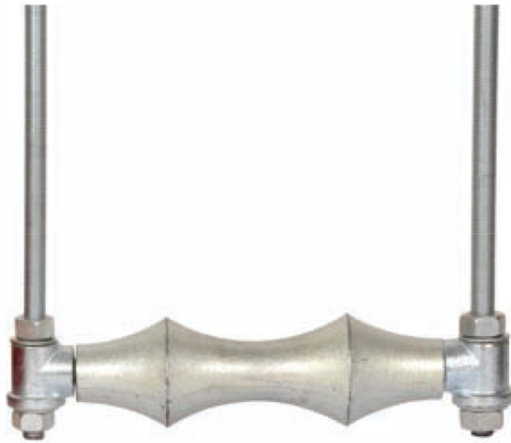

Features and benefits

- for support of pipes to provide axial movement
- multiple pipe installations possible by using two rollers
- versatile design permits axial movement of pipe due to expansion and contraction
- standard installation would support a single pipe and design permits installation of two pipes in double banking arrangement. In such cases ensure that the total weight of the installation is less than the maximum load of the roller as mentioned in the table
- material: steel
- electrogalvanized as per ASTM B 633 Standards (SC3)
- designed to meet MSS Standard SP-58, type 41 and SP-69
- insulation protection products such as Rubber Support Inserts, Insulation Protection Shields and Pipe Covering Protection Saddles can be used with Pipe Rollers

Part No.	D (")	G	k (mm)	F _{a,z} (N)
DM C28 8 060	2	M12	125	3,500
DM C28 8 075	2½	M12	144	3,500
DM C28 8 090	3	M12	157	3,500
DM C28 8 100	3½	M12	169	3,500
DM C28 8 115	4	M12	187	5,000
DM C28 8 140	5	M12	226	5,000
DM C28 8 168	6	M20	273	5,000
DM C28 8 220	8	M20	309	12,500
DM C28 8 273	10	M20	362	12,500
DM C28 8 323	12	M24	420	15,000
DM C28 8 355	14	M24	470	15,000
DM C28 8 406	16	M32	510	35,000
DM C28 8 457	18	M32	551	35,000
DM C28 8 508	20	M36	591	35,000
DM C28 8 610	24	M36	670	50,000

