


Plain Split Clamp

(B 05 305)

15 - 318 mm

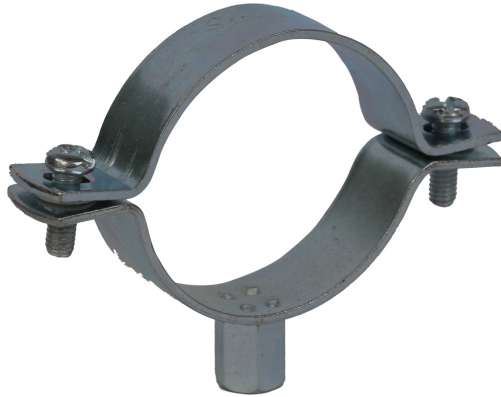

Features and benefits

- lock bolts with combi cross recessed head
- electrogalvanized as per ASTM B 633 Standards (SC3)
- for horizontal and vertical applications
- strenghtened lock bolts for high load capacity
- screws secured with anti-loss washer
- material: steel

Part No.	D (mm)	D (")	DN	G	B (mm)	H (mm)	h (mm)	b x s (mm)	F _{a,z} (N)	Pack 1
DMC133018	15 - 19	3/8	15	M8/10	59	30	23	20 x 2.0	2,000	600
DMC133022	20 - 25	1/2	22	M8/10	66	37	26	20 x 2.0	2,000	500
DMC133028	26 - 30	3/4	28	M8/10	72	43	29	20 x 2.0	2,000	400
DMC133035	32 - 36	1	35	M8/10	79	50	33	20 x 2.0	2,000	350
DMC133040	38 - 43	1 1/4	42	M8/10	86	57	36	20 x 2.0	2,000	300
DMC133048	47 - 51	1 1/2	48	M8/10	92	63	39	20 x 2.0	2,000	250
DMC133054	53 - 58	-	54	M8/10	98	69	42	20 x 2.0	2,000	250
DMC133060	60 - 64	2	60	M8/10	104	75	45	20 x 2.0	2,000	200
DMC133063	63 - 66	-	63	M8/10	108	72	47	20 x 2.0	2,000	200
DMC133070	68 - 72	-	70	M8/10	114	85	50	20 x 2.0	2,000	150
DMC133075	74 - 80	2 1/2	75	M8/10	119	90	53	20 x 2.0	2,000	150
DMC133083	81 - 86	-	83	M8/10	127	98	57	20 x 2.0	2,000	125
DMC133090	97 - 92	3	90	M8/10	134	105	60	20 x 2.0	2,000	125
DMC133100	99 - 105	3 1/2	100	M8/10	144	115	65	20 x 2.0	2,000	100
DMC133110	107 - 112	-	110	M8/10	164	125	70	20 x 2.0	2,000	100
DMC133115	113 - 118	4	115	M8/10	159	130	73	20 x 2.0	2,000	90
DMC133125	125 - 130	-	125	M8/10	169	140	78	20 x 2.0	2,000	75
DMC133133	131 - 137	-	133	M8/10	177	148	82	20 x 2.0	2,000	75
DMC133140	137 - 142	5	140	M8/10	184	155	85	20 x 2.5	3,000	75
DMC133150	148 - 153	-	150	M8/10	194	165	90	20 x 2.5	3,000	60
DMC133160	159 - 166	-	160	M8/10	204	175	95	25 x 2.5	3,000	60
DMC133168	168 - 172	6	168	M8/10	212	183	99	25 x 2.5	3,000	60
DMC133200	200 - 212	-	200	M8/10	244	215	115	25 x 2.5	3,000	60
DMC133220	215 - 220	8	200	M8/10	264	235	125	25 x 2.5	3,000	50
DMC133250	248 - 252	-	250	M8/10	294	265	140	25 x 2.5	3,000	50
DMC133315	313 - 318	-	315	M8/10	359	330	173	25 x 2.5	3,000	40

Hot Dip Galvanized and Stainless Steel option available on request.
 With connection size M10/12 available on request.
 With M6 Side Nuts available on request.

