

Walraven RapidStrut® Fixing Rail (pg)

(H 04 10)

for medium weight fixing applications



6505625


6505645

6505665

6505685



RAL-GZ 655/C
Cert.Nr. 2012-04



Features and benefits

- universal rail system
- distance between rail end and first hole is always equal
- inward formed flanges with serrated profile for extra grip
- with continuous smart hole pattern including round anchor holes
- with sawing marks each 50 mm on all 3 sides of the profile
- pre-galvanized
- for more information about the max. allowed load ($F_{a,2}$) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- material: steel 1.0242 (S250GD)
- strut 41x41x2.5 and above tested for fire safety according to EN 1363-1
- Walraven RapidStrut® channel support systems (type 21|L, 21|H, 41|L, 41|H) conform to BS 6946:1988, the British Standard Specification for metal channel cable support systems for electrical installations

| Part No. | Type | L | B | H | s | S | RAL | BndS | BndL | App. |
|----------|--------|------|------|------|------|------|------------------|------|------|------|
| | | (mm) | (mm) | (mm) | (mm) | (mm) | | | | |
| 6505222 | 21 M | 2 m | 41 | 21 | 2.00 | 22 | RAL ¹ | 20 | 200 | m. |
| 6505322 | 21 M | 3 m | 41 | 21 | 2.00 | 22 | RAL ¹ | 30 | 300 | m. |
| 6505622 | 21 M | 6 m | 41 | 21 | 2.00 | 22 | RAL ¹ | 60 | 600 | m. |
| 6505225 | 21 H | 2 m | 41 | 21 | 2.50 | 22 | RAL ¹ | 20 | 200 | m. |
| 6505325 | 21 H | 3 m | 41 | 21 | 2.50 | 22 | RAL ¹ | 30 | 300 | m. |
| 6505625 | 21 H | 6 m | 41 | 21 | 2.50 | 22 | RAL ¹ | 60 | 600 | m. |
| 6505242 | 41 M | 2 m | 41 | 41 | 2.00 | 22 | RAL ¹ | 20 | 100 | m. |
| 6505342 | 41 M | 3 m | 41 | 41 | 2.00 | 22 | RAL ¹ | 30 | 150 | m. |
| 6505642 | 41 M | 6 m | 41 | 41 | 2.00 | 22 | RAL ¹ | 60 | 300 | m. |
| 6505245 | 41 H | 2 m | 41 | 41 | 2.50 | 22 | RAL ¹ | 20 | 100 | m. |
| 6505345 | 41 H | 3 m | 41 | 41 | 2.50 | 22 | RAL ¹ | 30 | 150 | m. |
| 6505645 | 41 H | 6 m | 41 | 41 | 2.50 | 22 | RAL ¹ | 60 | 300 | m. |
| 6505365 | 62 H | 3 m | 41 | 62 | 2.50 | 22 | - | 30 | 90 | m. |
| 6505665 | 62 H | 6 m | 41 | 62 | 2.50 | 22 | - | 60 | 180 | m. |
| 6505385 | 82 H | 3 m | 41 | 82 | 2.50 | 22 | - | 30 | 90 | m. |
| 6505685 | 82 H | 6 m | 41 | 82 | 2.50 | 22 | - | 60 | 180 | m. |
| 6505620 | 21 H | 6 m | 41 | 21 | 2.50 | 22 | - | 60 | 600 | m. * |
| 6505640 | 41 H | 6 m | 41 | 41 | 2.50 | 22 | - | 60 | 300 | m. * |


RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/C.

Strut 41x41x2.5 and above tested for fire safety according to EN 1363-1.

* Unslotted

For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.

For more information about the max. allowed load ($F_{a,2}$) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'.

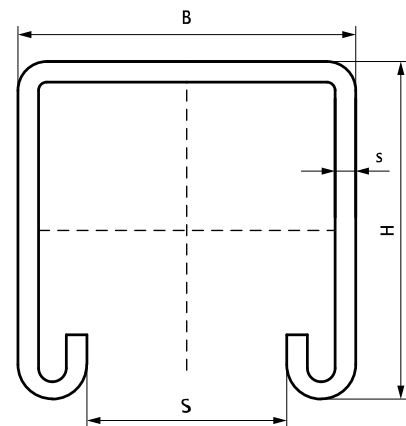

Complementary

- Walraven RapidStrut® Hammerfix G2 (BUP1000)
- Walraven RapidStrut® Slide Nut G2 (BUP1000)


Alternative

- Walraven RapidStrut® Fixing Rail DS 5 (BUP1000)

Walraven RapidStrut® Fixing Rail (pg)

for medium weight fixing applications

(H 04 10)

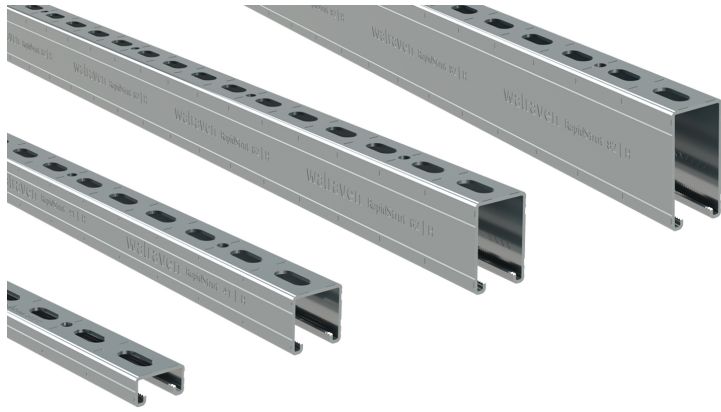

6505625



6505645

6505665

6505685



RAL-GZ 655/C
Cert.Nr. 2012-04

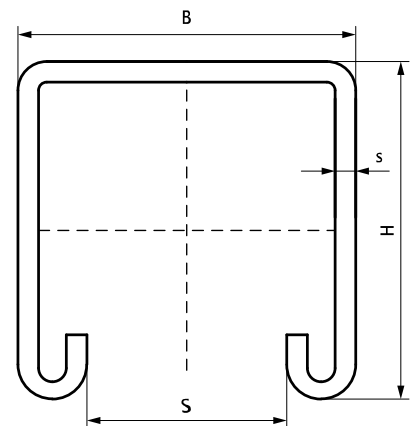

Complementary

- Walraven RapidStrut® Hammerfix G2 (BUP1000)
- Walraven RapidStrut® Slide Nut G2 (BUP1000)

Alternative

- Walraven RapidStrut® Fixing Rail DS 5 (BUP1000)