


# Walraven RapidStrut® Slide Nut G2 (BUP1000)


(H 24 04)

fixing to Strut rail

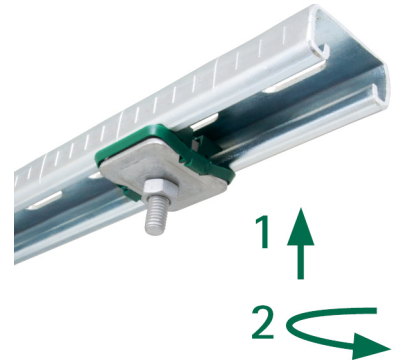



## Features and benefits

- slide nut with washer and BIS RapidStrut® spring
- ready-to-use pre-assembled for a quick fixing, and retains assembly in place before final tightening
- material: metal parts made of steel 1.0332; spring(s) made of POM (polyoxymethylene), green
- surface protection:
  - product is part of the Walraven BIS UltraProtect® 1000 system
  - suitable for in- and outdoor applications
  - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Part No.	G	s (mm)	T <sub>inst</sub> (Nm)	For Rail	F <sub>a,z</sub> (N)	F <sub>a,x</sub> (N)	Pack 1	Pack 2
665185106	M6	5.0	7	Strut	2,660	950	20	200
665185108	M8	6.0	11	Strut	3,120	1,100	20	200
665185110	M10	8.0	15	Strut	5,000	1,250	20	200
665185112	M12	9.0	22	Strut	5,000	2,440	20	200

M10 tested for fire safety according to EN 1366-1.  
 M12 tested for fire safety according to EN 1366-1.  
 Tested values in combination with BIS RapidStrut® Rail 41x41x2.5mm.  
 More details can be found on the Technical Datasheet.

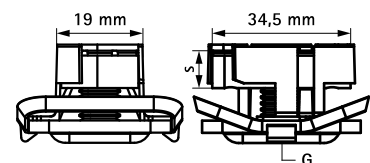

## Complementary

Walraven RapidStrut® Fixing Rail DS 5 (BUP1000)  
 Walraven RapidStrut® Cantilever Arm (BUP1000)