


BIS Strut Stainless Steel Connector 90°

(M 60 05)

to make Strut rail fabrications

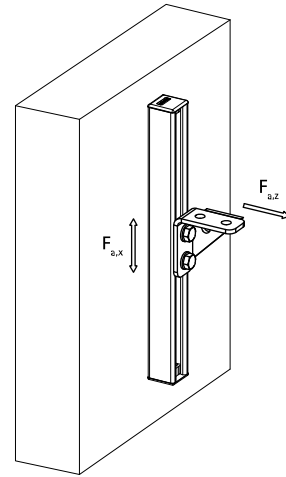

Features and benefits

- to make fabrication with Strut Rail
- material: stainless steel 1.4401 (AISI 316)
- easy fitting due to rounded edges

Part No.	a (°)	For Rail	F _{a,z} (N)	F _{a,z 2} (N)	F _{a,x} (N)	F _{a,x 2} (N)	Pack 1
6571291	90°	Strut	4,000	8,000	3,000	7,000	25

F_{a,z}: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5).
F_{a,z2}: max. allowed load (with rail 41x41x2.5).
F_{a,x}: max. allowed load acc. RAL GZ-655D (with rail 41x41x1.5 and bolted 2 x M12 - 30Nm).
F_{a,x2}: max. allowed load (with rail 41x41x2.5 and bolted 2 x M12 - 60Nm).

