


Pacifyre® AWM Max Fire Collar


(U 04 37)

for penetrations with flammable pipes 201 - 400 mm

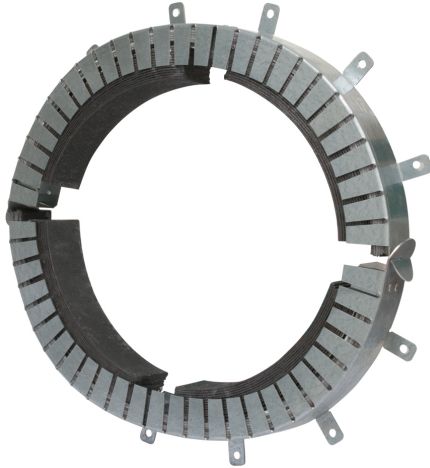

Features and benefits

- suitable for damp conditions
- should be fitted to both sides of a wall and on one side below a ceiling
- build in is possible without additional fixings (by simply bending and sliding the fixing tabs)
- easily installed due to 2 part collar construction
- various finish possibilities, e.g. acrylic sealant, mortar, etc.
- zero distance is possible between fire collars
- European approval: ETA-13/0906



Part No.	D (mm)	d (mm)	Model	B (mm)	H (mm)	Pack 1
2134225225	201 - 225	239	10 fixing tabs	328	50	1
2134250250	226 - 250	264	10 fixing tabs	353	50	1
2134280280	251 - 280	289	12 fixing tabs	378	50	1
2134300300	281 - 300	314	12 fixing tabs	403	50	1
2134315315	301 - 315	328	12 fixing tabs	417	50	1
2134355355	316 - 355	364	12 fixing tabs	453	50	1
2134400400	356 - 400	414	12 fixing tabs	503	50	1

