


BIS CP

(L 10 24)

fixing to aerated concrete, plaster block

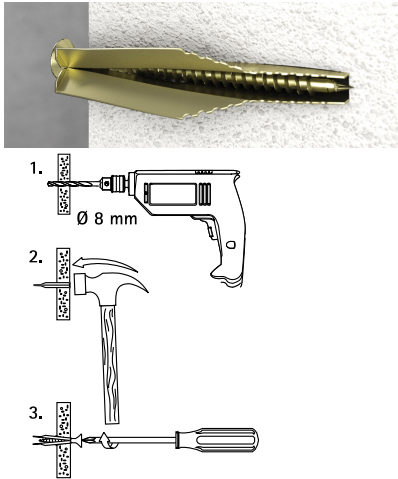

Features and Benefits

- hammer-in plug
- for medium applications into plaster block or aerated concrete block
- for chipboard screw (Ø 4.0 - 5.0 mm, min. length 45 mm)
- easy and quick to use
  - plug anchors itself when tightening the screw
  - does not rotate on screwing
- pre-drill hole Ø 8 mm to avoid breaking of material during screwing
- material: steel
- better fire resistance than plastic plugs
- surface treatment: zinc plated, colored

Part No.	Model	s (mm)	Lh (mm)	F <sub>a,z</sub> (N)	F <sub>a,x</sub> (N)	Pack 1	Pack 2
6117153	Incl. screws (TF)	4.0	50	400	750	100	600
6117063	Without Screws	-	-	400	750	150	900

Max. allowed load in plaster block (safety margin 1:2).

