


BIS Flexible Rail Prop

reinforcement of rail fabrications


(H 1607)

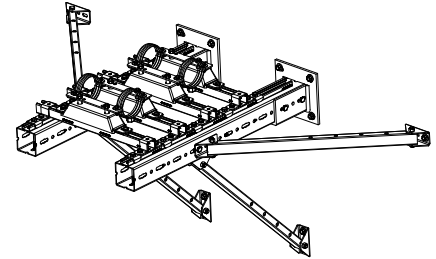

Features and Benefits

- flexible angle support bracket
- to strengthen rail constructions
- by additional holes the length can be reduced in steps of 100mm
- suitable for Strut rails and for Maxx rails
- material: u-plate steel 1.0242 (S250GD); tube profile: steel 1.0038 (S235JR)
- u-plate: Z275-MAC (pre-galvanized); tube profile: hot-dip galvanized 50-80 µm

Part No.	L	B (mm)	H (mm)	Fa,z (N)	Pack 1
662 1 083	929	83	92	7,500	1

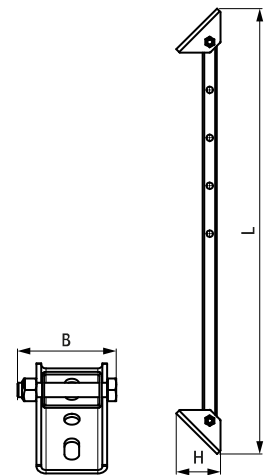

Complementary

BIS RapidStrut® Fixing Rail (pg)
 BIS RapidStrut® Fixing Rail Double (pg)
 Maxx Heavy Rail Profile

Complementary

WTB1 Throughbolt Anchor
 WCS1H Concrete Screw

Alternative

BIS Rail Prop (BUP1000)