


BIS RapidRail® Fixing Rail

(G 04 05)

suspension and support

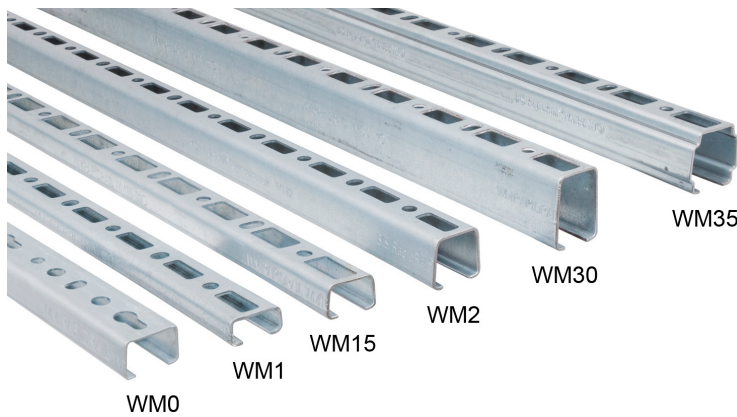

Features and Benefits

- C-profile
- for a quick and easy fixing
- with continuous perforation (on request without perforation)
- distance between rail end and first hole is always equal
- unique perforation on rail WM15, WM30 and WM35 allows for hanging on both sides
- pre-galvanized
- a continuous graduated centimetre scale on one side
- material: steel 1.0242
- yield strength 240 N/mm²




RAL-GZ 655/C
Cert.Nr. 2012-03

Part No.	Type	L	B (mm)	H (mm)	s (mm)	S (mm)	RAL	BndS	BndL	App.
650 5 000	WM0	2 m	27	18	1.20	15	RAL ¹	20	400	m.
650 5 600	WM0	6 m	27	18	1.20	15	RAL ¹	60	1.200	m.
650 5 001	WM1	2 m	30	15	2.00	15	RAL ¹	20	480	m.
650 5 601	WM1	6 m	30	15	2.00	15	RAL ¹	60	720	m.
650 5 515	WM1	0.50 m	30	15	2.00	15	RAL ¹	1	-	pc.
650 5 015	WM15	2 m	30	20	1.75	15	RAL ¹	20	480	m.
650 5 615	WM15	6 m	30	20	1.75	15	RAL ¹	60	720	m.
650 5 002	WM2	2 m	30	30	2.00	15	RAL ¹	20	400	m.
650 5 602	WM2	6 m	30	30	2.00	15	RAL ¹	60	600	m.
650 5 030	WM30	2 m	30	45	2.00	15	RAL ¹	20	240	m.
650 5 630	WM30	6 m	30	45	2.00	15	RAL ¹	60	360	m.
650 5 235	WM35	2 m	38	40	2.00	15	-	20	100	m.
650 5 635	WM35	6 m	38	40	2.00	15	-	60	300	m.


RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/C.

For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.

For more information about the max. allowed load (Fa,z) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.

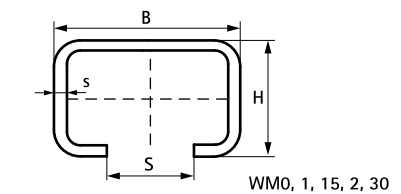

WM0, 1, 15, 2, 30



WM35

Complementary

- BIS RapidRail® Slide Nut
- BIS RapidRail® Hammerfix
- BIS Rail End Cap

Complementary

- BIS RapidRail® Connector 90°
- BIS RapidRail® Connector 135°