


BISOFIX® PIR20

for insulated pipes 12.0 - 273.1 mm


(D 03 50)

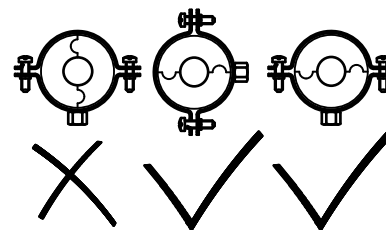

Features and Benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density <108mm = 80kg/m³
- PIR density >108mm = 120kg/m³
- PIR density 80kg/m³ => 0,027 [W/m*K]
- PIR density 120kg/m³ => 0,040 [W/m*K]
- temperature range -45 °C - +105 °C

Part No.	D (mm)	D (°)	DN	L	H (mm)	s (mm)	F _{a,z} (N)	Pack 1
I200000012	12.0	-	-	75 mm	52.0	20.0	120	25
I200000015	15.0 - 16.0	-	-	75 mm	55.0	20.0	160	25
I200000018	17.2 - 18.0	3/8	10	75 mm	58.0	20.0	170	25
I200000022	21.3 - 22.0	1/2	15	75 mm	62.0	20.0	180	25
I200000028	26.9 - 28.0	3/4	20	75 mm	68.0	20.0	200	25
I200000034	33.7 - 35.0	-	-	75 mm	75.0	20.0	220	25
I200000042	42.4	1 1/4	32	75 mm	82.4	20.0	280	25
I200000048	48.3	1 1/2	40	75 mm	88.3	20.0	300	25
I200000054	54.0	-	-	75 mm	94.0	20.0	320	25
I200000057	56.0 - 57.0	-	-	75 mm	97.0	20.0	330	25
I200000060	60.3	2	50	75 mm	100.3	20.0	340	25
I200000064	64.0	-	-	75 mm	104.0	20.0	350	25
I200000070	70.0	-	-	75 mm	110.0	20.0	370	25
I200000076	76.1	2 1/2	65	75 mm	116.1	20.0	390	25
I200000089	88.9	3	80	75 mm	128.9	20.0	430	25
I200000102	101.6	-	-	75 mm	141.6	20.0	450	25
I200000108	108.0	-	-	75 mm	148.0	20.0	500	25
I200000114	114.3	4	100	100 mm	154.3	20.0	1,110	15
I200000133	133.0	-	-	100 mm	173.0	20.0	1,360	5
I200000140	139.7	5	125	100 mm	179.7	20.0	1,410	5
I200000160	159.0 - 160.0	-	-	100 mm	200.0	20.0	1,520	5
I200000168	168.3	6	150	100 mm	208.3	20.0	1,570	5
I200000219	219.1	-	-	100 mm	259.1	20.0	1,620	8
I200000273	273.1	-	-	100 mm	313.0	20.0	1,670	2

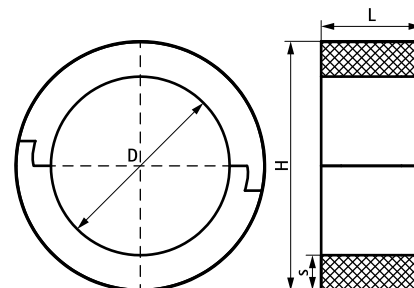

Complementary

- Bifix® G2 (M8/10) (BUP1000)
- 2S Clamp (M8/10)
- BIS Heavy Duty Clamp HD500 (BUP1000)

Complementary

- BIS Heavy Duty Clamp HD500 (BUP1000)