


BISOFIX® E25 + Bifix® G2

(D 03 30)

for insulated pipes 12.0 - 160.0 mm

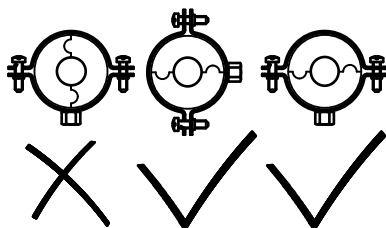

Features and Benefits

- for combination with elastomeric foam insulation
- vapourproof glueable with pipe insulation
- insulating pipe support with Bifix® G2 clamp
- Bifix® G2 with M8/M10 connection nut
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for D <80mm = 80kg/m³
- PIR density for D >80mm = 120kg/m³
- surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature range -45 °C - +105 °C

Part No.	Consists Of	D (mm)	Model	F _{a,z} (N)	Pack 1
I253008012	I250000012 + 3008064	12.0	BISOFIX® E25 + Bifix® G2 Clamp	100	50
I253008015	I250000015 + 3008070	15.0	BISOFIX® E25 + Bifix® G2 Clamp	100	50
I253008018	I250000018 + 3008070	17.2 - 18.0	BISOFIX® E25 + Bifix® G2 Clamp	100	50
I253008022	I250000022 + 3008079	21.3 - 22.0	BISOFIX® E25 + Bifix® G2 Clamp	100	50
I253008028	I250000028 + 3008079	26.9 - 28.0	BISOFIX® E25 + Bifix® G2 Clamp	100	50
I253008035	I250000035 + 3008091	33.7 - 35.0	BISOFIX® E25 + Bifix® G2 Clamp	100	50
I253008042	I250000042 + 3008105	42.4	BISOFIX® E25 + Bifix® G2 Clamp	150	50
I253008048	I250000048 + 3008105	48.3	BISOFIX® E25 + Bifix® G2 Clamp	225	50
I253008054	I250000054 + 3008105	54.0	BISOFIX® E25 + Bifix® G2 Clamp	225	50
I253008057	I250000057 + 3008115	57.0	BISOFIX® E25 + Bifix® G2 Clamp	225	25
I253008060	I250000060 + 3008115	60.3	BISOFIX® E25 + Bifix® G2 Clamp	350	25
I253008064	I250000064 + 3008130	64.0	BISOFIX® E25 + Bifix® G2 Clamp	350	25
I253008070	I250000070 + 3008140	70.0	BISOFIX® E25 + Bifix® G2 Clamp	425	25
I253008076	I250000076 + 3008140	76.1	BISOFIX® E25 + Bifix® G2 Clamp	575	25
I253008089	I250000089 + 3008160	88.9	BISOFIX® E25 + Bifix® G2 Clamp	875	25
I253008102	I250000102 + 3008169	101.6	BISOFIX® E25 + Bifix® G2 Clamp	1,000	25
I253008108	I250000108 + 3008180	108.0	BISOFIX® E25 + Bifix® G2 Clamp	1,075	5
I253008114	I250000114 + 3008180	114.3	BISOFIX® E25 + Bifix® G2 Clamp	1,250	5
I253008133	I250000133 + 3008200	133.0	BISOFIX® E25 + Bifix® G2 Clamp	1,475	5
I253008140	I250000140 + 3008210	139.7	BISOFIX® E25 + Bifix® G2 Clamp	1,700	5
I253008160	I250000160 + 3008225	159.0 - 160.0	BISOFIX® E25 + Bifix® G2 Clamp	1,950	5