


BISOFIX[®] PIR80 + HD500

(D 03 98)

for insulated pipes 88.9 - 120.0 mm

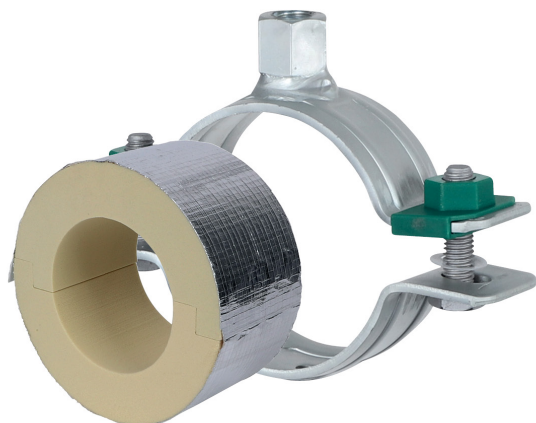

Features and Benefits

- for combination with rigid foam insulation
- cover joints with aluminium tape
- insulating pipe support with HD500 clamp
- HD500 clamp with M8/M10 and M10/M12 connection nut
- does not contain CFC, HCFC, formaldehyde or cadmium
- fire class B2
- PIR density for $D < 110\text{mm} = 80\text{kg/m}^3$
- PIR density for $D > 110\text{mm} = 120\text{kg/m}^3$
- thermal conductivity lambda (approx. value): 0.30 W/(mK)
- surface protection:
 - product is part of the Walraven BIS UltraProtect[®] 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- temperature range $-45\text{ °C} - +105\text{ °C}$

Part No.	Consists Of	D (mm)	Model	F _{a,z} (N)	Pack 1
I803306089	I800000089 + 33068254	88.9	BISOFIX [®] PIR80 + HD500 Clamp	800	5
I803306100	I800000100 + 33068264	100.0	BISOFIX [®] PIR80 + HD500 Clamp	820	5
I803306114	I800000114 + 33068279	114.3	BISOFIX [®] PIR80 + HD500 Clamp	1,860	5
I803306120	I800000120 + 33068289	120.0	BISOFIX [®] PIR80 + HD500 Clamp	2,150	5