


# Pacifyre<sup>®</sup> MK II Fire Sleeve (P)


(U 04 05)

for penetrations of plastic pipes (non-insulated) 15 - 204 mm

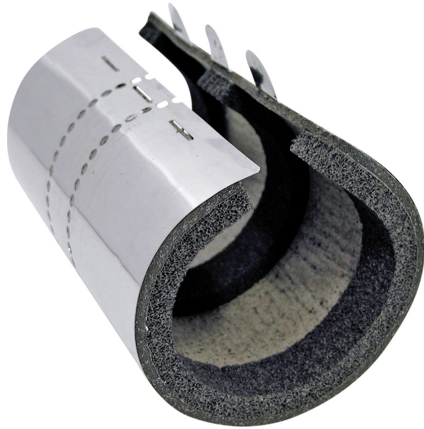


## Features and Benefits

- for pipe penetrations in accordance with e.g. DIN 4102-11 or DIN EN 1366-3 in walls (solid walls or light partition walls) and ceilings with fire protection requirements
- the sleeve provides a guaranteed protection against fire, smoke and noise
- expansion and contraction of the pipe remains possible
- minimum space required, therefore can be applied in areas of hard accessibility
- a higher flexibility due to minimal overhang on wall and ceiling seals
- no tools, drilling or extra fixing materials needed
- simple and easy to install
- maintenance free
- noise reduction test report from IRB (Fraunhofer Institut - Germany) available
- tested according to EN 1366-3
- in accordance with many EU country building regulations



Part No.	D (mm)	DN	d (mm)	Pack 1	Pack 2
215 1 015017	15 - 17	15	40	1	9
215 1 018020	18 - 20	20	45	1	9
215 4 024026	23 - 28	25	50	1	9
215 4 030032	29 - 36	32	55	1	9
215 4 039041	38 - 44	40	65	1	8
215 4 048050	46 - 52	50	75	1	8
215 4 051053	48 - 55	52	75	1	8
215 4 054056	52 - 58	56	80	1	8
215 4 057059	55 - 61	58	85	1	8
215 4 063065	61 - 67	63	90	1	8
215 4 075077	70 - 79	75	100	1	6
215 4 078080	74 - 82	80	105	1	6
215 4 090092	86 - 94	90	115	1	6
215 4 108110	104 - 113	110	135	1	6
215 8 123125	120 - 128	125	160	1	5
215 8 135137	131 - 139	135	170	1	5
215 8 138140	136 - 144	140	175	1	5
215 8 159161	155 - 164	160	195	1	5
215 2 198200	195 - 204	200	245	1	4

For Pacifyre<sup>®</sup> MK II Fire Sleeves in other sizes, please contact your Walraven Sales Company.

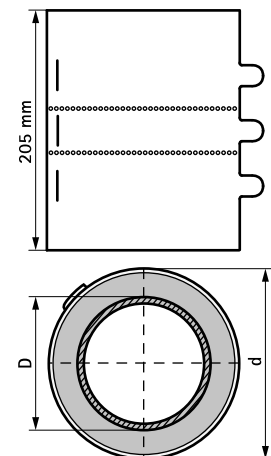

### Complementary

Tangit FP 550 2C Fire Protection Foam  
Tangit FP 800 Fire Protection Coating  
Pacifyre<sup>®</sup> FPM

### Complementary

Pacifyre<sup>®</sup> ID-Card