


Pacifyre® MK II Fire Sleeve (P)


(U 04 05)

for penetrations of plastic pipes (non-insulated) 15 - 204 mm

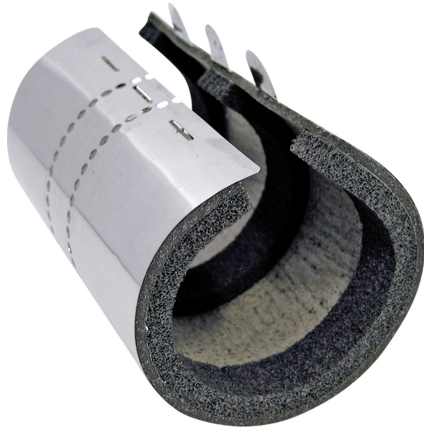


Features and Benefits

- for pipe penetrations in accordance with e.g. DIN 4102-11 or DIN EN 1366-3 in walls (solid walls or light partition walls) and ceilings with fire protection requirements
- the sleeve provides a guaranteed protection against fire, smoke and noise
- expansion and contraction of the pipe remains possible
- minimum space required, therefore can be applied in areas of hard accessibility
- a higher flexibility due to minimal overhang on wall and ceiling seals
- no tools, drilling or extra fixing materials needed
- simple and easy to install
- maintenance free
- noise reduction test report from IRB (Fraunhofer Institut - Germany) available
- tested according to EN 1366-3
- in accordance with many EU country building regulations



Part No.	D (mm)	DN (mm)	d (mm)	Pack 1	Pack 2
215 1 015017	15 - 17	15	40	1	9
215 1 018020	18 - 20	20	45	1	9
215 4 024026	23 - 28	25	50	1	9
215 4 030032	29 - 36	32	55	1	9
215 4 039041	38 - 44	40	65	1	8
215 4 048050	46 - 52	50	75	1	8
215 4 051053	48 - 55	52	75	1	8
215 4 054056	52 - 58	56	80	1	8
215 4 057059	55 - 61	58	85	1	8
215 4 063065	61 - 67	63	90	1	8
215 4 075077	70 - 79	75	100	1	6
215 4 078080	74 - 82	80	105	1	6
215 4 090092	86 - 94	90	115	1	6
215 4 108110	104 - 113	110	135	1	6
215 8 123125	120 - 128	125	160	1	5
215 8 135137	131 - 139	135	170	1	5
215 8 138140	136 - 144	140	175	1	5
215 8 159161	155 - 164	160	195	1	5
215 2 198200	195 - 204	200	245	1	4

For Pacifyre® MK II Fire Sleeves in other sizes, please contact your Walraven Sales Company.

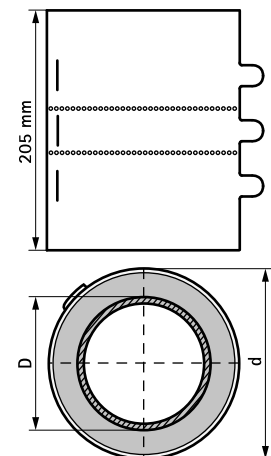

Complementary

Tangit FP 550 2C Fire Protection Foam
Tangit FP 800 Fire Protection Coating
Tangit FP 430 Fire Protection Acrylic Sealant

Complementary

Pacifyre® FPM
Pacifyre® ID-Card