

W5000 Cushion Clamp


(H 32 210)

to be used for plastic pipe applications 12 - 63 mm



Features and Benefits

- the new alternative to the Cushion Clamp
- with removable spacer washers, making the clamp suitable for either sliding or anchoring
- one-piece design - no loose parts
- easier, faster, safer - installs with one hand
- 3-way screw head - Phillips, flat and hex
- W Series Clamps are boxed for easy handling - no more bags
- material: steel 1.0242
- surface treatment: high grade Zn-Mg based coating (600 hours salt spray)
- green EPDM rubber lining will prevent plasticiser migration
- noise/vibration insulating lining according DIN EN ISO 3822-1
- age resistant lining
- Test Reports:
 - Strength, Fire and Smoke:UL 1565 Listed
 - Plasticizer migration behavior:2016-TR151002-V5
 - Noise emission:2016-SG-Bauakustik-1647-001-16

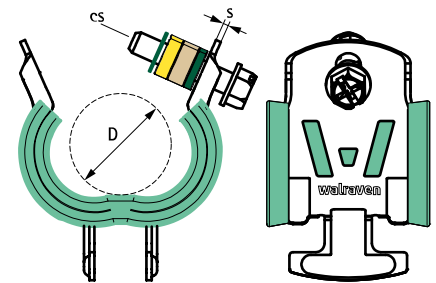

Part No.	D (mm)	D (")	D / CTS (")	D / IPS (")	s (mm)	cs	F _{a,z} (N)	F _{a,z} (lbs)	ULS	ULC	Pack 1
205 5 007	12 - 13	0.472 - 0.512	3/8	-	1.25	1/4"	890	200	ULS	ULC	50
205 5 008	14 - 15	0.512 - 0.591	-	1/4	1.25	1/4"	890	200	ULS	ULC	50
205 5 009	15 - 16	0.512 - 0.591	1/2	-	1.25	1/4"	890	200	ULS	ULC	50
205 5 010	17 - 18	0.630 - 0.748	-	3/8	1.25	1/4"	980	220	ULS	ULC	50
205 5 012	19 - 22	0.787 - 0.906	5/8 - 3/4	1/2	1.25	1/4"	980	220	ULS	ULC	50
205 5 013	24 - 25	0.984 - 1.142	-	-	1.50	1/4"	1,780	400	ULS	ULC	50
205 5 014	26 - 29	0.984 - 1.142	1	3/4	1.50	1/4"	1,780	400	ULS	ULC	50
205 5 016	32 - 35	1.260 - 1.378	1-1/4	1	1.50	1/4"	1,780	400	ULS	ULC	50
205 5 020	40 - 43	1.575 - 1.693	1-1/2	1-1/4	1.75	5/16"	1,780	400	ULS	ULC	25
205 5 022	47 - 49	1.850 - 1.929	-	1-1/2	1.75	5/16"	1,780	400	ULS	ULC	25
205 5 023	50 - 52	1.969 - 2.047	-	-	1.75	5/16"	1,780	400	ULS	ULC	25
205 5 024	53 - 54	2.087 - 2.126	2	-	1.75	5/16"	1,780	400	ULS	ULC	25
205 5 025	56 - 58	2.205 - 2.283	-	-	1.75	5/16"	1,780	400	ULS	ULC	25
205 5 026	60 - 63	2.362 - 2.480	-	2	1.75	5/16"	1,780	400	ULS	ULC	25

For additional testing information, please contact our Sales Office!

Complementary

BIS RapidStrut® Fixing Rail (BUP1000)