





WCA1 Ceiling Anchor

(L 05 18)



Features and Benefits

- for suspending ceilings and fixing pipes and cable trays on walls and ceilings
- fast and simple mounting
- up to 40 seconds faster mounting compared to conventional anchors
- one product for two ports: M8 / M10 threaded stages
- nail anchor with double thread
- combined with double thread M8/10 with M8 and M10 threaded rods
- very small edge and axial spacings
- nail anchor expands automatically under load, and anchored in the borehole
- reduced anchorage depth of only 25 mm and drill hole depth of 35 mm
- no concrete reinforcement hits
- European Technical Approval for multiple fixings in cracked concrete

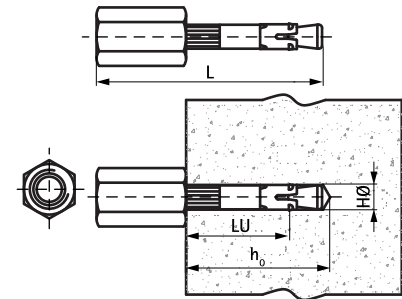

Part No.	L	LU (mm)	HØ (mm)	h ₀ (mm)	For	F _{a,z} (N)	F _{a,z} (F30 - (N))	F _{a,x} (N)	CE	ETA	Pack 1	Pack 2
6096300800	58 mm	25	6	35	M8 + M10 Threaded parts	2,140	600	7,300	CE	ETA	100	900

Max. allowed load (F_{a,z}) refers to a concrete grade of C20 / 25th. In case of fire (F60 - F120) values will significantly decrease. For detailed information please see ETA-11/0240th.