

WUP Uni Plug


(L 07 07)

standard universal anchor for all types of substrates



Features and Benefits

- high load capacity
 - can be used with wood screws, chipboard screws and metric bolts
 - suitable for variety of substrates
 - easily slides into holes
 - does not slip past collar in deep holes
 - does not expand prematurely
 - resists rotation in holes
 - Application:
 - shelves
 - wall-mounted cabinets
 - sanitary fixings
 - HVAC and plumbing fixings
- material: high quality PA6 polyamide
 - substrate type:
 - lightweight concrete
 - concrete
 - masonry
 - hollow masonry
 - rock
 - sand-lime bricks
 - natural stone
 - gypsum

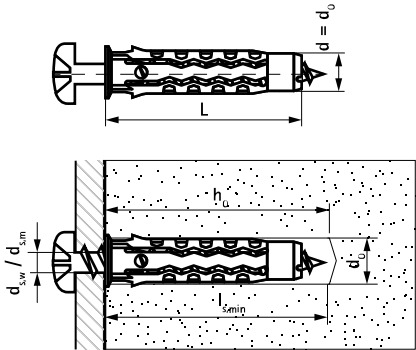

Part No.	Code	L	l _{s,min}	d ₀	h ₀	d _{s,w}	d _{s,m}	Rec. Tension Load Solid Brick	Rec. Tension Load Perforated Brick	Rec. Tension Load C20/25 Concrete	Rec. Tension Load Lightweight Concrete	Rec. Tension Load Sandstone	Pack 1	Pack 2
			(mm)	(mm)	(mm)	(mm)	(mm)	(kN)	(kN)	(kN)	(kN)	(kN)		
61007206	WUP 6x30	30 mm	34	6	40	3.5 - 5.0	M4	0.90	0.20	0.45	0.12	0.70	500	6,000
61007208	WUP 8x40	40 mm	44	8	50	4.5 - 6.0	-	1.00	0.40	1.15	0.19	1.00	300	3,600
61007210	WUP 10x50	50 mm	54	10	70	6.0 - 8.0	-	1.10	0.45	1.90	0.30	1.80	150	1,800
61007212	WUP 12x60	60 mm	64	12	70	8.0 - 10.0	-	1.50	0.50	2.70	0.40	2.10	100	1,200

Given recommended tension loads have been reached using a maximum diameter wood screw and include a safety factor of 5.