


Walraven RapidRail® Cantilever Arm (BUP1000)

(G 10 05)

fixing to wall or ceiling

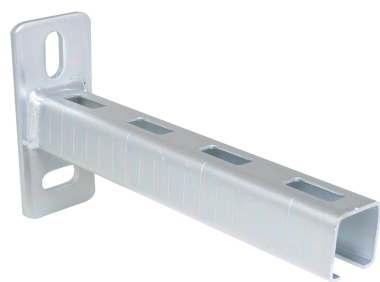

Features and Benefits

- wall plate with welded C-profile
- perfectly suitable for hanging to the ceiling
- slots at 90° to each other to simplify fixing
- CO₂ welded
- a continuous graduated centimetre scale on one side
- unique perforation on rail 30x20, 30x30 and 38x40 allows for hanging on both sides
- material: steel
- surface protection:
 - product is part of the Walraven BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227

Part No.	L	B	H	s	d1	S	k	From Rail	Pack 1
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
6603030	300 mm	38	110	4.0	25 x 11	15	70	27x18	20
6603050	500 mm	38	110	4.0	25 x 11	15	70	27x18	20
6603115	150 mm	48	110	5.0	25 x 11	15	70	30x15	20
6603125	250 mm	48	110	5.0	25 x 11	15	70	30x15	20
6603715	150 mm	38	110	4.0	25 x 11	15	70	30x20	20
6603720	200 mm	38	110	4.0	25 x 11	15	70	30x20	20
6603215	150 mm	48	110	5.0	25 x 11	15	70	30x30	20
6603225	250 mm	48	110	5.0	25 x 11	15	70	30x30	10
6603245	450 mm	48	110	5.0	25 x 11	15	70	30x30	20
For more information about the max. allowed load ($F_{0,2}$) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.									

Complementary

Walraven Rail Prop
Walraven RapidRail® Slide Nut
Walraven RapidRail® Hammerfix

Complementary

Walraven Tee-Bolt Assembly
Walraven Rail End Cap
BIS Washer (BUP1000)