


Walraven RapidRail® Fixing Rail

(G 04 05)

for light fixing applications

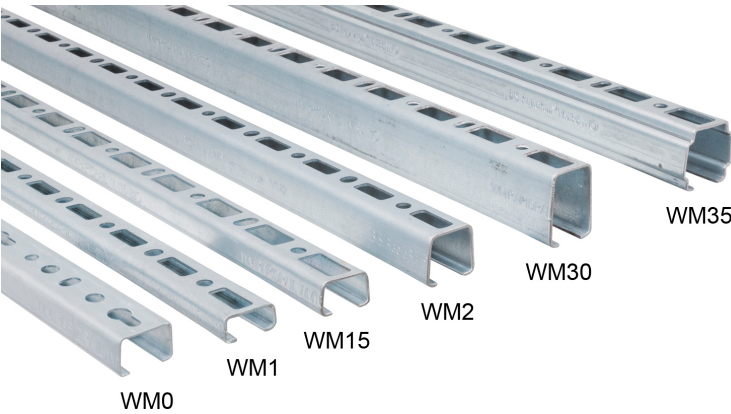


Features and Benefits

- C-profile
- for a quick and easy fixing
- with continuous perforation
- distance between rail end and first hole is always equal
- unique perforation on rail 30x20, 30x30 and 38x40 allows for hanging on both sides
- pre-galvanized
- a continuous graduated centimetre scale on one side
- material: steel 1.0242



Part No.	Type	L	B	H	s	S	RAL	BndS	BndL	App.
6505300	27x18	3 m	27	18	1.20	15	RAL ¹	30	600	m.
6505600	27x18	6 m	27	18	1.20	15	RAL ¹	60	1.200	m.
6505001	30x15	2 m	30	15	2.00	15	RAL ¹	20	480	m.
6505301	30x15	3 m	30	15	2.00	15	RAL ¹	30	720	m.
6505601	30x15	6 m	30	15	2.00	15	RAL ¹	60	720	m.
6505515	30x15	0.5 m	30	15	2.00	15	RAL ¹	10	-	pc.
6505015	30x20	2 m	30	20	1.75	15	RAL ¹	20	480	m.
6505315	30x20	3 m	30	20	1.75	15	RAL ¹	30	720	m.
6505615	30x20	6 m	30	20	1.75	15	RAL ¹	60	720	m.
6505002	30x30	2 m	30	30	2.00	15	RAL ¹	20	400	m.
6505302	30x30	3 m	30	30	2.00	15	RAL ¹	30	600	m.
6505602	30x30	6 m	30	30	2.00	15	RAL ¹	60	600	m.

RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/C.
For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.
For more information about the max. allowed load ($F_{a,z}$) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidRail®'.

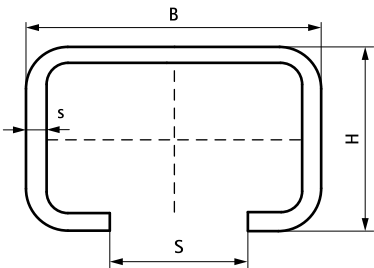

Complementary

- Walraven RapidRail® Slide Nut
- Walraven RapidRail® Hammerfix
- Walraven Rail End Cap

Complementary

- Walraven RapidRail® Connector 90°
- Walraven RapidRail® Connector 135°
- Walraven RapidRail® Woodscrew TX30