

# Walraven RapidStrut® Fixing Rail Double (pg)


(H 04 40)

for medium weight fixing applications



## Features and Benefits


- universal rail system
- with continuous perforation
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0332
- strut 41x41x2.5 and above tested for fire safety
- for more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'



Part No.	L	B (mm)	H (mm)	s (mm)	S (mm)	BndS	App.
6505626	6 m	41	42 (21 x 2)	2.50	22	150	m.
6505646	6 m	41	82 (41 x 2)	2.50	22	150	m.
6505666	6 m	41	124 (62 x 2)	2.50	22	90	m.

Strut 82 (41x2) and above tested for fire safety.

For more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'.

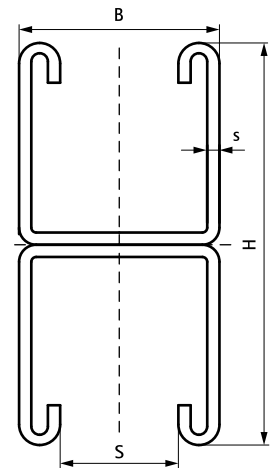

## Alternative

Walraven RapidStrut® Fixing Rail DS 5 (BUP1000)