

# Walraven RapidStrut® Stainless Steel Channel

(M 45 05)

suspension and support



6507X27


6507X47

## Features and Benefits

- universal rail system
- distance between rail end and first hole is always equal
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- Walraven RapidStrut® channels 41x41x2.5 tested for fire safety according to EN 1363-1
- for more information about the max. allowed load ( $F_{a,2}$ ) please refer to the loading tables or our online datasheet 'Walraven RapidStrut® Data Sheet'
- material: stainless steel 1.4404 (AISI 316L)



Part No.	L	B	H	s	S	Pack 1	BndS	BndL
		(mm)	(mm)	(mm)	(mm)			
6507327	3 m	41	21	2.50	22	3	150	-
6507627	6 m	41	21	2.50	22	6	300	-
6507347	3 m	41	41	2.50	22	3	150	-
6507647	6 m	41	41	2.50	22	6	60	300

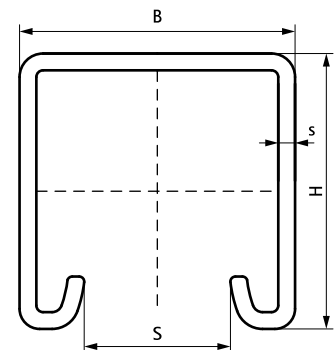

### Complementary

- Walraven RapidStrut® Stainless Steel Slide Nut G2
- Walraven RapidStrut® Stainless Steel Slide Nut with Tabs
- BIS Strut Stainless Steel Tee-Bolt

### Complementary

- Walraven RapidStrut® Stainless Steel Base Plate G2