

Walraven Yeti[®] 335 Step-Over with 2 Steps

(I 10 15)

prefabbed Step-Over Set for Rooftop Installations



Features and Benefits

- complete set for installation of Step-Over on flat and low pitched roofs
- with non-slip anti-vibration mat (at PVC roofs a separating layer must be installed to protect against plasticizer migration - see Walraven BIS Yeti[®] Triplex Separation Layer)
- predefined load capacity: calculation not necessary
- pre-assembled ready-to-use set for quick installation
- with hand railing made from non-perforated rail
- mouldings made of WPC, a composite of recycled plastic and wood fibre
- resistant to UV and chemical influences
- rail system construction: surface protection:
 - product is part of the BIS UltraProtect[®] 1000 system
 - suitable for in- and outdoor applications
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
- grids / steps: surface protection: hot dip galvanized
- noise reduction according to DIN EN ISO 10140-1 and DIN EN ISO 10140-3 up to 31 dB(A)
- UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB
- designs according to EN 14122



Nr.
1762-001-19




ITB No.
LZM00-02259



Part No.	L	L1 (mm)	B (mm)	B1 (mm)	H (mm)	H1 (mm)	H2 (mm)	F _{a,z} (N)	Pack 1
67685821	1,811 mm	967 mm	1,362	1,000	1,508	372	440	2,000	1

For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.

In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.

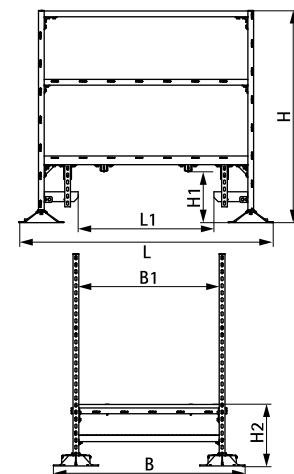

Complementary

Walraven Yeti[®] Triplex Separation Layer