



# BIS Strut Cross Connector (BUP1000)

(H 28 143)

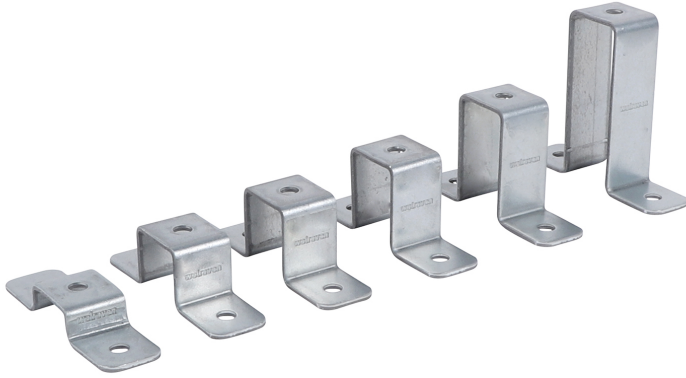


## Features and benefits

- connector to make cross connections between Strut rails
- to connect Strut rails to wall or ceiling
- the hole pattern is adapted to the hole pattern of Strut rails to use throughbolts
- user friendly by rounded edges
- material: steel 1.0242 (S250GD) + ZM310 MAC
- surface protection:
  - product is part of the Walraven BIS UltraProtect® 1000 system
  - suitable for in- and outdoor applications
  - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227



Part No.	L	B	H	s	d1	S	k	For Rail	Pack 1
		(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		
66588292	141 mm	40	24	4.0	12.2	42	100	Strut 41x21	25
66588294	141 mm	40	44	4.0	12.2	42	100	Strut 41x41	25
66588295	141 mm	40	54	4.0	12.2	42	100	Strut 41x51 (BIS RapidStrut® DS 5)	25
66588296	141 mm	40	64	4.0	12.2	42	100	Strut 41x62	20
66588298	141 mm	40	84	4.0	12.2	42	100	Strut 41x82	10
66588299	141 mm	40	126	4.0	12.2	42	100	Strut 41x124	10

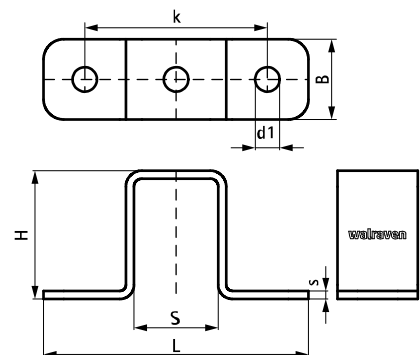

### Complementary

- Walraven RapidStrut® Fixing Rail DS 5 (BUP1000)
- Walraven RapidStrut® Fixing Rail (BUP1000)
- Walraven Strut Slide Nut (BUP1000)

### Complementary

- Walraven RapidStrut® Slide Nut with Plastic Tabs (BUP1000)
- BIS Washer (Flat) (BUP1000)