
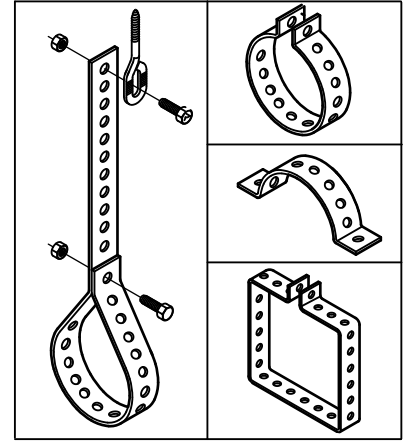


BIS Suspension Band – Plated

(K 05 05)


fixing of pipes and air ducts

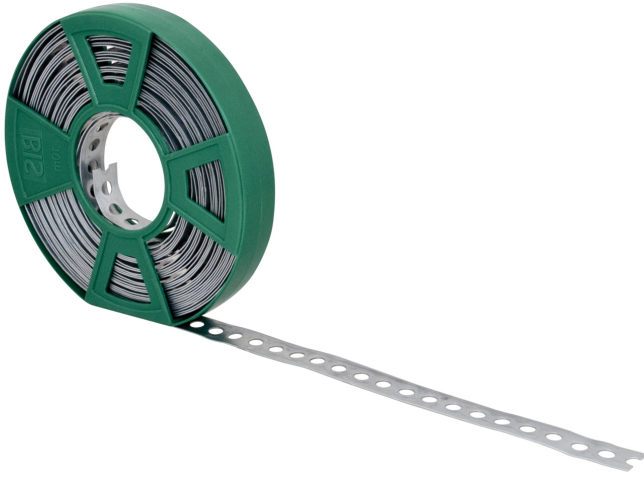

Features and benefits

- with continuous perforation
- material: steel
- pre-galvanized

Part No.	Type	L	b x s (mm)	d1 (mm)	k (mm)	F _{a,z} (N)	Pack 1	App.
0830012	5055	10 m	12 x 1.0	5.0	8.0	1,050	10	pc.
0830017	5055	10 m	17 x 1.0	7.0	12.0	1,500	10	pc.
0830117	5055	10 m	17 x 1.0	6.5	15.0	1,290	10	pc.
0831012	5055L	10 m	12 x 0.8	5.0	8.0	840	10	pc.
0831017	5055L	10 m	17 x 0.8	7.0	12.0	1,070	10	pc.
0831026	5055L	10 m	26 x 1.0	8.5	14.0	2,620	1	pc.

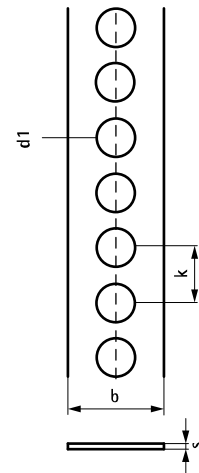

Complementary

- BIS Suspension Eye (Female Threaded)
- BIS Shouldered Masonry Nail
- BIS Suspension Eye – Wood Thread

Complementary

- BIS Suspension Eye – Metric
- BIS HK