BIS Yeti® 335 Support System (BUP1000)

(I 04 10)

for Rooftop Installations

Features and benefits

- modular supporting system for HVAC equipment, solar panels, walkways, pipe work, cable runs, etc.
- for flat roofs
- for horizontal and vertical applications
- 360° rotatable insert for BIS RapidStrut® 41x41 or BIS RapidStrut® DS 5 (41x52 mm)
- with non-slip anti-vibration mat
- noise reduction according to DIN EN ISO 10140-1 and DIN EN ISO 10140-3 up to 31 dB(A)
- UV-resistance according to EN ISO 16474-3:2014-02 - certified by ITB
- mouldings made of WPC, a composite of recycled plastic and wood fibre
- resistant to UV and chemical influences

Nr. 1762-001-19

ITB No. LZM00-02259

Part No.	Model	L	B (mm)	H (mm)	h (mm)	$F_{a,z}$ (N)	$F_{a,z\ 2}$ (N)	$M_{a,y}$ (Nm)	Pack 1	Pack 2
67685201	Vertical	335 mm	335	100	20	20,000*	30,000**	200.0	1	90

** = Maximum allowed load for Strut 41x41x2.5.*
*** = Maximum allowed load for Strut 41x51x2.0 - DS5.*
For a detailed calculation and for support how to spread the load please contact Walraven Technical Support.
In cases where a foot is used in roof applications, the installer is obliged to verify maximum load capacity of roof before installation.

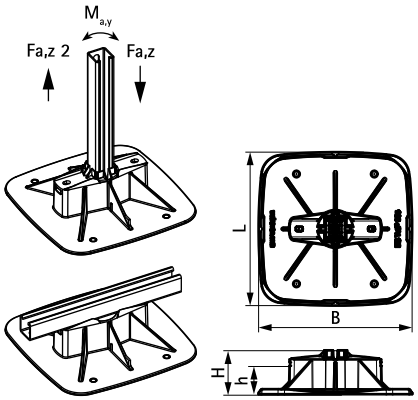

Complementary

BIS Yeti® Triplex Separation Layer
BIS Yeti® 335 Hinge (BUP1000)

Alternative

BIS Yeti® 130 Support System

EN-UK 02/2023- Subject to modifications