

# BIS RapidStrut® Fixing Rail Double (hdg)


(H 04 45)

suspension and support



## Features and Benefits


- universal rail system
- with continuous perforation
- a continuous graduated centimetre scale on one side
- inward formed flanges with serrated profile for extra grip
- material: steel 1.0332
- yield strength 240 N/mm<sup>2</sup>
- hot dip galvanized
- strut 41x41x2.5 and above tested for fire safety
- for more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidStrut®'



Part No.	L	B	H	s	S	BndS	BndL	App.
		(mm)	(mm)	(mm)	(mm)			
6501646	6 m	41	82 (41x2)	2.50	22	6	150	m.
6501666	6 m	41	124 (62x2)	2.50	22	60	90	m.
6501686	6 m	41	164 (82x2)	2.50	22	6	90	m.

Strut 82 (41x2) and above tested for fire safety.

For more information about the max. allowed load ( $F_{a,z}$ ) please refer to the loading tables or our online datasheet 'Technical Details BIS RapidStrut®'.

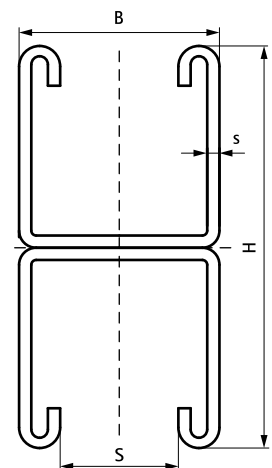

**Complementary**  
BIS Strut Slide Nut (hdg)

**Alternative**  
BIS RapidStrut® Fixing Rail DS 5  
(BUP1000)