

BIS Rubber Absorption Piece

(F05 25)

noise insulation for rail

A



B




C




Features and Benefits

- noise insulating element
 - e.g. for noise insulating suspension of fixing rail in combination with threaded rod M10
 - rubber absorption pieces are suitable to use with RapidStrut® Rails and RapidRail® Profiles
 - material: metal parts made of steel; silent block made of TPE rubber, black
 - noise insulation up to 16dB(A) on average, when combined with RapidRail® 27x18, compared to directly installed clamps
- zinc plated



RapidRail®




RapidStrut®


Part No.	Type	R	B (mm)	H (mm)	F _{a,z} (N)	Pack 1
A 4125007	M	10.1	30	19.5	-	100
B 4125008	F	10.1	30	10.0	-	100
C 4125006	M + F	10.1	30	23.0	600	50

The maximum allowed load can be higher under strict conditions and is depending on the frequency, for conditions and details please consult our technical department.


A

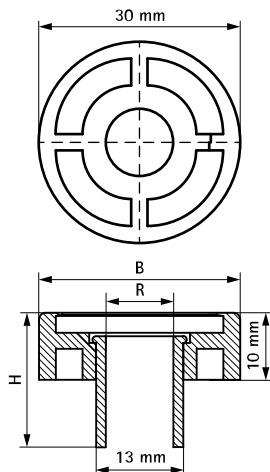

B

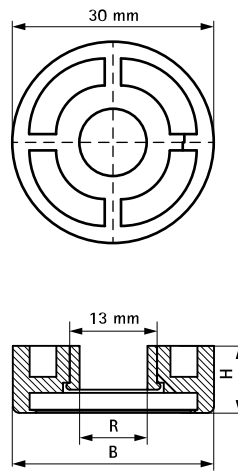

C

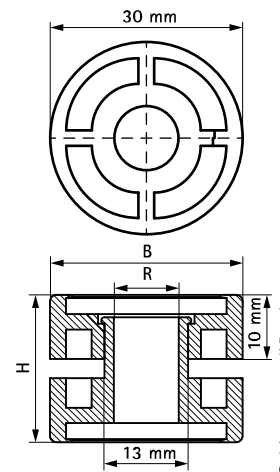

Complementary

Walraven RapidStrut® Fixing Rail (pg)
 BIS RapidStrut® Fixing Rail Double (pg)
 RapidRail® Fixing Rail

Complementary

BIS Threaded Rod