


Pacifyre® MK II Fire Sleeve (M) – Small

(U 04 10)

for penetrations of metal pipes (insulated or non-insulated) 15 - 89 mm

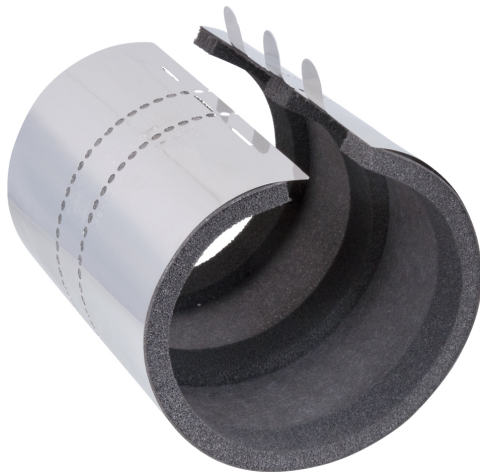


Features and Benefits

- for pipe penetrations of insulated or non-insulated metal pipes in accordance with e.g. BS476-20, in walls (solid walls or light partition walls) and ceilings with fire protection requirements
- the sleeve provides a guaranteed protection against fire, smoke and noise
- expansion and contraction of the pipe remains possible
- minimum space required, therefore can be applied in areas of hard accessibility
- a higher flexibility due to minimal overhang on wall and ceiling seals
- no tools, drilling or extra fixing materials needed
- simple and easy to install
- maintenance free
- noise reduction test report from IRB (Fraunhofer Institut - Germany) available
- tested according to EN 1366-3
- in accordance with many EU country building regulations



Part No.	D (mm)	D (")	DN	d (mm)	Pack 1	Pack 2
2141015017	15 - 17	3/8	10	39	1	9
2141018020	18 - 20	-	-	42	1	9
2141021023	21 - 23	1/2	15	45	1	9
2141027029	27 - 29	3/4	20	51	1	12
2141033035	33 - 35	1	25	57	1	9
2141042044	42 - 44	1 1/4	32	66	1	8
2141048050	48 - 50	1 1/2	40	72	1	8
2141060062	60 - 62	2	50	84	1	8
2141075077	75 - 77	2 1/2	65	99	1	6
2141087089	87 - 89	3	80	111	1	6

For Pacifyre® MK II Fire Sleeves in other sizes, please contact your Walraven Sales Company.

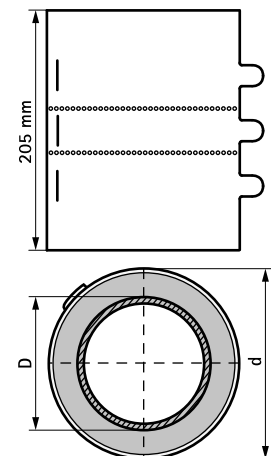

Complementary

Tangit FP 550 2C Fire Protection Foam
Tangit FP 800 Fire Protection Coating
Pacifyre® FPM

Complementary

Pacifyre® ID-Card