



WCS1M Concrete Screw


(L 03 65)

high performance concrete screw with male thread connection

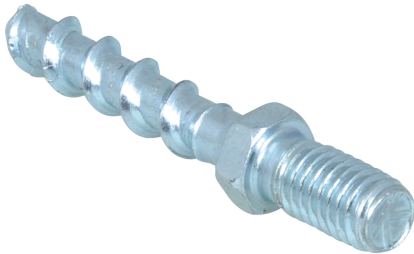

Features and Benefits

- high load capacity
- simple and quick installation procedure
- approved for use in precast prestressed hollow core slabs
- up to 3 anchoring depths provide maximum installation flexibility
- reduced edge and anchor spacing distances
- pre- and through-fixing
- material: steel
- zinc plated
- ETA Option 1 approval for cracked and non-cracked concrete
- ETA according to EAD 330747-00-0601 for multiple use for non-structural applications
- fire resistance class R30-R120 for design of anchorages under exposure to fire
- seismic performance category C1 for design of anchorages under seismic action
- complies with VdS CE 4001:2014-04 (05) and VdS VdS CE 4001:2019-01 (06) for

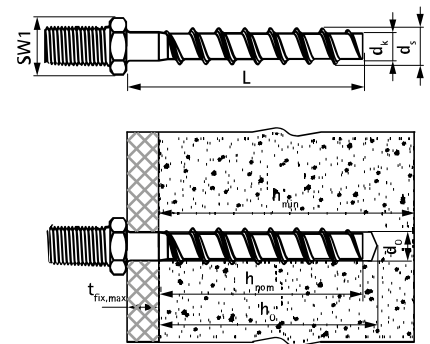

Part No.	Code	Size	L	dk (mm)	ds (mm)	d0 (mm)	h0 (mm)	hmin (mm)	hnom (mm)	t _{fix,max} (mm)	SW1 (mm)	Rec. Tension Load C20/25 Concrete (kN)	Pack 1
6253104	WCS1M 6x35 M8	6	35 mm	5.1	7.5	6	40	80	35	0	10	1.43*	100
6253106	WCS1M 6x55 M8	6	55 mm	5.1	7.5	6	60	100	55	0	10	3.57*	100

* Recommended loads: are stated for multiple use for non-structural applications according to ETAG001, Part 6; apply to anchors correctly installed at maximum embedment depth; include partial safety factor and an overall partial safety factor for action of 1.4. The partial safety factor for action depends on the type of loading and shall be taken from national regulations. All anchor failure modes and the entire relevant product European Technical Assessment must be considered for anchor design. For more information, please refer to the ETA report.

Complementary

- WIS Brush
- WIS Blow Pump
- WSDS+ 3CE Concrete Drill Bit

Complementary

- WSDS+ HB Hollow Block Drill Bit