


WPER500-S Chemical Anchoring System

(L 03 94)



Features and Benefits

- always correct mixing ratio thanks to the static mixer nozzle
 - installations in flooded holes without any negative effect on performance
 - cartridge may be used up over several times (each installation after a break requires new mixing nozzle)
 - reduced concrete edge and anchor spacing distances
 - reduced drilling diameter for M20 and M24, resulting in 50% product saving during installation
- ETA Option 1 approval for cracked and non-cracked concrete
 - ETA TR023 for post-installed rebar connections
 - seismic performance categories C1 and C2 for design of anchorages under seismic action
 - WRAS Material Approval for contact with potable water
 - LEED v4.1 attestation
 - A+ VOC emissions class
 - substrate type:
 - cracked concrete
 - non-cracked concrete

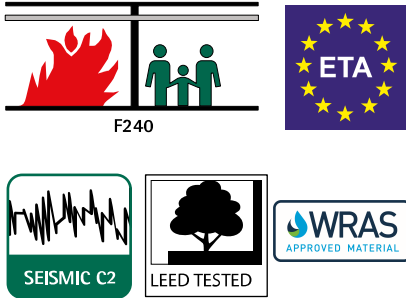

Part No.	Code	ETA	LEED	WRAS	VOC+	Seismic	Pack 1
6099161	WPER500-S	ETA	LEED	WRAS	VOC+	C1C2	12